

# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

Superlite | 8x8x16 Normal Weight CMU

## ENVIRONMENTAL PRODUCT DECLARATION



Since 1946, Superlite's manufacturing facilities have produced Architectural Masonry and Concrete products. These products include the traditional and antiqued paver and wall series, concrete block, and brick. Superlite products have a long history of successful applications on thousands of residential and commercial projects throughout Arizona.

Each day, in all plants, finished products are systematically sampled and are put through comprehensive tests. These tests include measuring resistance to temperature extremes, product stability, consistency of mixture and load-bearing capacity, among many other physical and chemical characteristics.

To learn more about Superlite, an Oldcastle® company visit our website at:

[www.superliteblock.com](http://www.superliteblock.com)

4150 W. Turney Avenue  
Phoenix, AZ 85019






*Phoenix Children's Hospital*



**Certified  
Environmental  
Product Declaration**  
[www.nsf.org](http://www.nsf.org)

# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

## ENVIRONMENTAL PRODUCT DECLARATION VERIFICATION

EPD Information			
Program Operator		NSF International	
Declaration Holder		Superlite Block	
Product 8X8X16 Normal Weight CMU	Date of Issue September 26, 2015	Period of Validity 5 Years	Declaration Number EPD10062
This EPD was independently verified by NSF International in accordance with ISO 14025:  <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External		  Jenny Oorbeck <a href="mailto:JOorbeck@nsf.org">JOorbeck@nsf.org</a>	
This life cycle assessment was independently verified by in accordance with ISO 14044 and the reference PCR:		  Jack Geibig <a href="mailto:jgeibig@ecoform.com">jgeibig@ecoform.com</a>	
LCA Information			
Basis LCA		Lifecycle Assessment Manager for Segmental Concrete Paving Products EPD August, 2015	
LCA Preparer		David R. Green BASF Corporation 216-839-7803	
This life cycle assessment was critically reviewed in accordance with ISO 14044 by:		Jack Geibig Ecoform, LLC <a href="mailto:jgeibig@ecoform.com">jgeibig@ecoform.com</a>	
PCR Information			
Program Operator		ASTM International	
Reference PCR		Manufactured Concrete and Concrete Masonry Products (UN CPC 3755)	
Date of Issue		December, 2014	
PCR review was conducted by:		Nicholas Santero PE International ASTM International <a href="http://www.astm.org">http://www.astm.org</a>	

EPD Program Operator  
NSF International  
789 N. Dixboro Rd.  
Ann Arbor, MI 48105 USA  
[www.nsf-sustainability.org](http://www.nsf-sustainability.org)

Date of Issue: September 26, 2015  
Period of Validity: 5 years  
Declaration#: EPD10062



# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

## Environmental Product Declaration for Manufactured Concrete and Concrete Masonry Products

Declared Unit: 1 m<sup>3</sup> of concrete

### TOTAL PRIMARY ENERGY CONSUMPTION

*Superlite 8x8x16  
Normal Weight CMU*

Nonrenewable Fossil	1,858 MJ
Nonrenewable Nuclear	138 MJ
Renewable (solar, wind, hydroelectric, and geothermal)	24 MJ
Renewable (biomass)	249 MJ

### TOTAL MATERIAL RESOURCE CONSUMPTION

Nonrenewable Material Resources	274 kg
Renewable material resources	9 kg
Net fresh water	364 l
Non-hazardous generated	1.02E-01 kg
Hazardous waste generated	0 kg

### LIFE CYCLE IMPACT CATEGORY INDICATOR

Global Warming Potential	354 kg CO <sub>2</sub> eq
Acidification Potential	2 kg SO <sub>2</sub> eq
Eutrophication Potential	0.7 kg N eq
Smog Creation Potential	0.5 kg O <sub>3</sub> eq
Ozone Depletion Potential	5.06E-06 kg CFC-11 eq

characterization factors based on TRACI 2.1




# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

## ENVIRONMENTAL PRODUCT DECLARATION: DETAILED VERSION

### Product Description



The Superlite 8x8x16 normal weight concrete masonry units represented by this cradle-to-gate EPD are produced at two plants in Arizona: West Phoenix (4601 N. 42<sup>nd</sup> Avenue Phoenix, AZ 85019) and Superlite Block (2200 W. Gardner Lane Tucson, AZ 85705) under ASTM C-90 specification for Loadbearing Concrete Masonry Units. The Concrete Masonry Units are used in a wide variety of low-rise buildings from residential to educational to commercial.



### Declared Unit



The ASTM PCR for concrete and concrete masonry products only covers the cradle-to-gate life-cycle stages. Therefore, the declared unit for this EPD is one (1) m<sup>3</sup> of concrete formed into manufactured concrete and concrete masonry products. The EPD may be presented additionally per one (1) yd<sup>3</sup> of concrete. This EPD covers only the cradle-to-gate impacts of manufactured concrete and concrete masonry products using a declared unit, and the results cannot be used to compare between products.

### System Boundaries



Based on the ASTM PCR, the system boundaries are defined as the modules for raw material supply, transportation of inbound materials and the manufacturing process also known as the Product Stage. The stages include extraction and processing of raw materials (raw material supply), the average or specific transportation of raw materials from extraction site or source to the manufacturing site including empty backhauls (transportation of inbound materials) and the manufacturing of the product including the batching and mixing of the concrete, forming of the units, curing of the units and the applicable post-production finishing of the units which includes the packaging with associated transportation and waste disposal in preparing the product for shipment. (Manufacturing process).

### Waste Management



Hazardous and non-hazardous waste generated within the system boundaries and transported outside of the plant facility are reported in the EPD per declared unit.

### Certification Other Standards/Additional Testing Requirements



Each product presented in this EPD conforms to the appropriate ASTM and/or CSA specification which provide detailed descriptions and specifications for each of the products.

### Allocation Rules



A production process that generates more than one type of product may require the allocation of environmental flows from the process to the different products to get product-

# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

based inventory data. If allocation is necessary, the requirements and guidance of ISO 14044, Section 4.3.4 are followed.

- i. Recycled and recovered materials are considered raw materials. Only the materials, water, energy, emissions and other elemental flows associated with reprocessing, handling, sorting and transportation from the point of the generating industrial process to their use in the production process was considered.
- ii. Slag, fly ash and silica fume are considered recovered materials, not co-products.
- iii. Allocation related to the transportation of materials is based on the mass of the transported material or product.
- iv. Emissions from the downstream recycling or combustion of a product after the end-of-waste state is allocated to the new downstream product(s). Incineration of wastes for energy production at the primary production site are allocated to the building product unless the energy is exported.
- v. Concrete that is crushed for recycling and used as a substitute for aggregate for the production of manufactured concrete and concrete masonry products is treated as closed-loop recycling. The flows and impacts associated with the recovery and crushing of the recycled concrete is taken into account and allocation is not necessary as the use of secondary material displaces the use of primary materials.
- vi. A deviation of greater than 20% where different allocation options are relevant requires a sensitivity analysis. The different allocation approaches and data sets are documented within this EPD.

## Units and Quantities

The standard SI unit is used for reporting results. IP units reported are converted using the following conversion factors.

Multiply	By	To convert to
Square meter (m <sup>2</sup> )	10.76391	Square foot (ft <sup>2</sup> )
Kilogram (kg)	2.204622	Pound (lb)
Megajoule (MJ)	947.8170	British Thermal Unit (BTU)
Degree Celsius (°C)	(°C*9/5)+32	Degree Fahrenheit (°F)
Cubic meter (m <sup>3</sup> )	35.31466	Cubic foot (ft <sup>3</sup> )
Meter (m)	3.281	Foot (ft)
Metric tonne (t)	1.102	Ton

## Calculation Rules and Data Quality Requirements

### Calculations

All inputs and outputs of a unit process for which data is reasonably available is included in the calculations. Any application of the criteria for the exclusion of inputs and outputs is documented. Data gaps that have been filled with conservative assumptions with average or generic data is documented.



# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

The cutoff criteria for the consideration of flows is as follows:

Mass – a flow less than 1% of the cumulative mass of the model flows may be excluded if its environmental relevance is minor.

Energy – a flow less than 1% of the cumulative energy of the system model may be excluded if its environmental relevance is minor.

Environmental relevance – material and energy flows that are known or expected to have potentially relevant emissions to air, water or soil relative to the indicators noted in the PCR are included.

At least 95% of the energy usage and mass flow are included. The life cycle impact data includes at least 95% of all elementary flows that contribute to each of the declared category indicators.

## Data Quality

- The data used in the generation of this EPD is representative according to the temporal, geographical and technological requirements of the PCR.
- The information representing the manufacturing process uses annual average values.
- The average background data is less than ten years for industry average data and five years for producer specific data.
- The owner of the EPD that is not the owner of all upstream processes contacted their suppliers within the system boundary for upstream data. The best available data from literature was used when upstream data was not provided. The literature based data meets the data quality requirements of the PCR.



## Product Characteristics

This EPD represents the specific environmental impacts associated with the production of load-bearing concrete masonry units suitable for non-load bearing and load-bearing applications and complies with ASTM C90 or CSA A165.1.



## Material Content/Base Materials

The materials for the production of 8x8x16 Normal Weight Concrete Masonry Units are listed here by mass (kg/m<sup>3</sup>).


Ingredient	Mass
Cement	168
Fine Aggregate	1,130
Course Aggregate	660
Water	44
MasterCast 900	0.31



# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

## Production/Manufacturing

The product manufacturing phase includes the extraction and processing of raw materials, the average or specific transportation of raw materials from extraction site or source to the manufacturing site including empty backhauls and the manufacturing of the product including the batching and mixing of the concrete, forming of the units, curing of the units and the applicable post production finishing of the units.

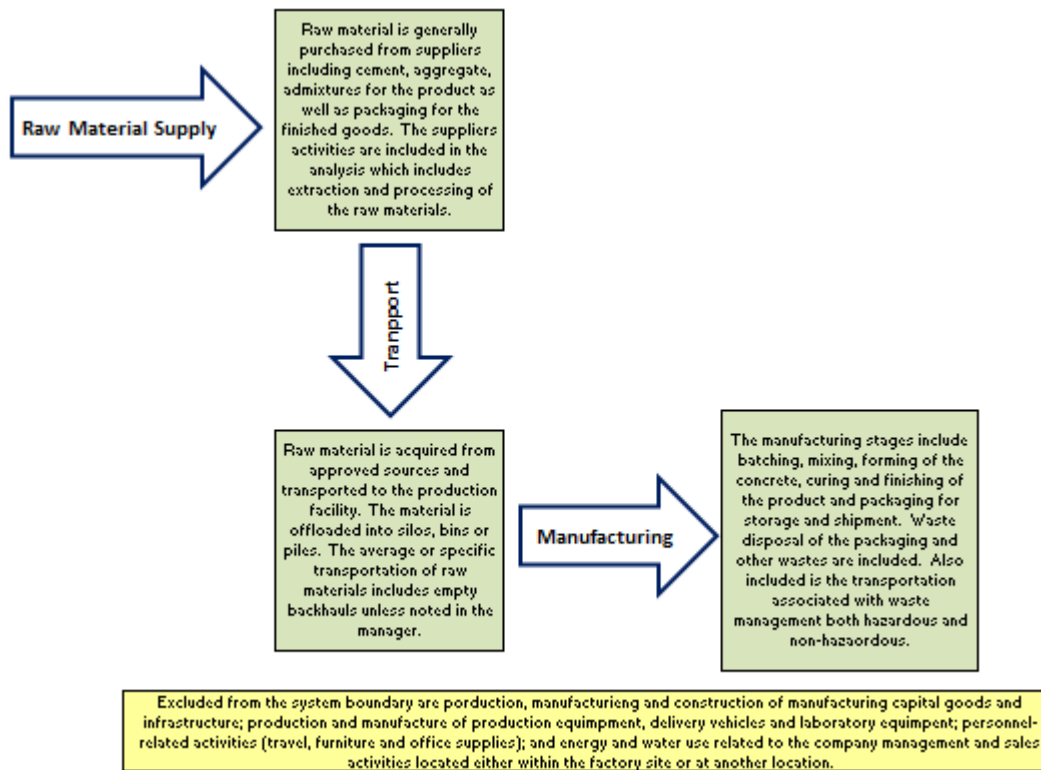

## Life Cycle Assessment Stages



The life-cycle stages and individual modules included within the LCA system boundaries are shown here. The EPD that is based on the PCR included modules A1, A2 and A3. The results of these modules are reported in one aggregated module; A1-A3.



# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

Product Stage			Construction Process Stage		Use Stage								End of Life Stage		
Raw Material Supply	Transport	Manufacturing	Transport	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4

Life-cycle Stages and Modules - highlighted area is included in the EPD Manager

## Life Cycle Assessment (LCA)



The data used for the generation of EPD are representative according to temporal, geographical and technological requirements per the PCR. Additional details are provided in the EPD Project Report.

LCI	Database	Year (Updated)	Region	Technology
Portland Cement	BEST	2015	United States	Current
Fly Ash	BEST	2014	United States	Current
Slag	BEST	2012	United States	Current
Natural aggregate	BEST	2003	United States	Current
Manufactured aggregate	BEST	2015	Regional Avg	Average
Natural course aggregate	BEST	2015	Regional Avg	Average
Manufactured course aggregate	BEST	2013	United States	Current
Water	BEST	2013	United States	Current
Recycled water	BEST	2015	United States	Current
MasterPel 200 HD	BEST	2015	United States	Current
MasterPel 240	BEST	2015	United States	Current
MasterPel 240 MA	BEST	2015	United States	Current
MasterCast 630S	BEST	2015	United States	Current
MasterCast 750 HS	BEST	2015	United States	Current
MasterCast 825	BEST	2015	United States	Current
MasterCast 900	BEST	2015	United States	Current
MasterCast 900S	BEST	2015	United States	Current
Color	BEST	2014	United States	Current
Wood	BEST	2015	United States	Current
Cardboard	BEST	2015	United States	Current
Steel strapping	BEST	2015	United States	Current
Plastic	BEST	2014	Regional Avg	Current
Electricity	BEST	2013	United States	Current
Steam	BEST	2013	United States	Current
Gas	BEST	2015	United States	Current
Truck	BEST	2014	United States	Current
Rail	BEST	2015	United States	Current
Sea	BEST	2015	United States	Current

EPD Program Operator  
NSF International  
789 N. Dixboro Rd.  
Ann Arbor, MI 48105 USA  
www.nsf sustainability.org

Date of Issue: September 26, 2015  
Period of Validity: 5 years  
Declaration#: EPD10062





# Environmental Product Declaration (EPD) for Manufactured Concrete and Concrete Masonry Products

**Temporal:** The information obtained from the manufacturing process is based on annual values generated within the past twelve-month period. Any average background data greater than ten years old is noted in the attached table and accompanied by a statement attesting to the validity of the data.

**Geographical:** The geographic region for the relevant life-cycle stages included in the calculation of representative data is documented in the following table.

**Technological:** All of the data is representative of current technology in use.



## Parameters to be Declared in the EPD

The information declared in this EPD is based on the requirements of the PCR. The results are presented on page 3 of this document and include the declaration of environmental category indicators, the use of resources and the generation of waste. The results presented are based on the specific product description for this EPD. This EPD is based on cradle-to-gate analysis. EPD that are created using different PCR may not be compatible. Additional information and explanatory materials can be requested through NSF International. In the event that this EPD represents an average performance for the products depicted, the EPD will represent an average performance.



## Other Environmental Information

Additional information on environmental programs at Superlite, an Oldcastle Company may be found at <http://superliteblock.com/>

## References



1. ASTM International Product Category Rules (PCR) for Manufactured Concrete and Concrete Masonry Products (UN CPC 3755), December 2014.
2. Saling, P., A. Kicherer, B. Dittrich-Kraemer, R. Wittlinger, W. Zombik, I. Schmidt, W. Schrott, and S. Schmidt. 2002. Eco-efficiency Analysis by BASF: The Method. *Int. J. Life Cycle Assess.*, 7 (4): 203.
3. Shonnard, D.; Kicherer, A; and Saling, P. Industrial Applications Using BASF Eco-Efficiency Analysis: Perspectives on Green Engineering Principles. *Environ. Sci. Technol.* 2003, 37, 5340-5348.
4. ISO, International Organization for Standardization. Environmental Management-Life Cycle Assessment-Principles and Framework; ISO 14040:2006; ISO 14044:2006. ISO, Geneva, Switzerland, [www.iso.org](http://www.iso.org) (2006)
5. ISO, International Organization for Standardization. Environmental Management- Eco-efficiency assessment of product systems -- Principles, requirements and guidelines; ISO 14045. ISO, Geneva, Switzerland, [www.iso.org](http://www.iso.org) (2012)
6. Boustead Consulting Ltd UK, The Boustead Model 5.1.2600.2180 LCA database.

EPD Program Operator  
NSF International  
789 N. Dixboro Rd.  
Ann Arbor, MI 48105 USA  
[www.nsfustainability.org](http://www.nsfustainability.org)

Date of Issue: September 26, 2015  
Period of Validity: 5 years  
Declaration#: EPD10062

