



Environmental Product Declaration

Sherwin William Armorseal 8100 Gloss Flooring System



**Certified
Environmental
Product Declaration**
www.nsf.org

Program Operator	NSF International 789 N. Dixboro, Ann Arbor, MI 48105 www.nsf.org	 
PCR identification	PCR for Resinous Floor Coatings NSF International National Center for Sustainability Standards Valid through December 17, 2023	
Manufacturer Name and Manufacturing Address	Sherwin Williams 1426 W 3rd St, Cleveland, OH 44113	
Product Description	Armorseal 8100 Gloss Flooring Systems are a set of resinous floor coatings. Under the reference PCR, Armorseal 8100 Gloss Flooring Systems fall under the following classification: “Thin-mil: A resin rich coating system typically comprised of a primer, body coat(s), and topcoat installed less than 40 mils.”	
Product Category	Thin-mil floor coatings	
Declaration Number	EPD 11099	
Declared Product and Functional Unit	Armorseal 8100 Gloss Flooring System 1 m ² of covered and protected flooring surface for a period of 15 years (commercial technical service life), 10 years (commercial market service life), and 5 years (industrial market service life and technical service life)	
Product’s intended Application and Use	Commercial Flooring	
Market Lifetimes Used in Assessment	10 Years for Commercial Application, 5 Years for Industrial Application	
Technical Lifetimes Used in Assessment	15 Years for Commercial Application, 5 Years for Industrial Application	
Markets of Applicability	North America	
Information on where explanatory material can be obtained	https://industrial.sherwin-williams.com/na/us/en/protective-marine/catalog/product/protective-and-marine-coatings/products-by-industry.11543396/armorseal-8100.PCP_57503.html	
Date of Issue	06/19/2025	
Period of Validity	5 years from date of issue	
EPD Type	Product Specific	
EPD Scope	Cradle to Grave	
Year of reported manufacturer primary data	2023	
LCA Software and Version Number	Sphera LCA for Experts (fka Gabi) 10.9	
LCI Database and Version Number	Sphera Managed LCA Content (fka Gabi) 2024.2	
LCIA Methodology and Version Number	IPCC AR6, TRACI 2.1, CML 2001-Aug 2016	
This declaration was independently verified in accordance with ISO 14025: 2006. The UL Environment “Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report,” v3.1 (February 2018), based on CEN Norm EN 15804 (2012) and ISO 21930:2017, serves as the core PCR, with additional considerations from the USGBC/UL Environment Part A Enhancement (2017) ☐ Internal ☒ External	Jack Geibig – EcoForm jgeibig@ecoform.com 	
This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:	WAP Sustainability	
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	Jack Geibig – EcoForm jgeibig@ecoform.com 	
Limitations: <i>In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. As such, caution should be exercised when evaluating EPDs from different manufacturers or programs, as the EPD results may not be entirely comparable. Any EPD comparison must be carried out at the construction works level per ISO 21930:2017 guidelines. The results of this EPD reflect an average performance by the product and its actual impacts may vary on a case-to-case basis.</i>		

Company Profile

Sherwin-Williams is an American paints and coatings company based in Cleveland, Ohio. It is primarily engaged in the manufacture, distribution, and sale of paints, coatings, floorcoverings, and related products. For more information about Sherwin-Williams, the products contained in this EPD, or other Sherwin-Williams products call 1-866-540-1299 or email coatings@sherwin.com.

Product Definition and Characteristics

Armorseal 8100 Gloss is a family of resinous floor coating product systems manufactured by Sherwin Williams in its Andover, KS facility. The coatings offer outstanding durability, chemical resistance, and bacterial/fungal growth resistance. Under the reference PCR, Armorseal 8100 Gloss Flooring falls under the following classification:

“Thin-mil: A resin rich coating system typically comprised of a primer, body coat(s), and topcoat installed less than 40 mils.”



This EPD covers nine unique Armorseal Gloss products. Armorseal 8100 Gloss product installations are two layers each comprised of a Part A and Part B component. Part A components function as resins and Part B components function as hardeners. When combined, these components generate durable flooring fit for a wide variety of applications. As illustrated in Table 1, Armorseal products are referred to herein by the SKUs of the Part A and Part B used in each installation (e.g., a product that uses Part A: B70W08111 and Part B: B70V08100 is denoted as B70W08111_B70V08100). Table 3 illustrates the material composition of the components included in the Armorseal 8100 Gloss products covered in this EPD. For more information about specific products, please visit www.sherwin.com.

This EPD presents full LCA results for the highest and lowest impact products within this product family (in bold text in Table 1). Global Warming Potential (GWP) results are listed for all other products following the representative product results tables.

Table 1: Armorseal 8100 Products covered in this EPD and their mass per functional unit for all RSL scenarios

Product Name (Part A_Part B)	Commercial Market Service Life (kg)	Commercial Technical Service Life (kg)	Industrial Market or Technical Service Life (kg)
B70W08111_B70V08100	3.19	2.12	6.37
B70W08113_B70V08100	3.00	2.00	6.01
B70T08104_B70V08100	2.87	1.92	5.75
B70A08101_B70V08100	3.07	2.04	6.13
B70A08100_B70V08100	3.10	2.06	6.19
B70R08100_B70V08100	3.12	2.08	6.24
B70B08100_B70V08100	2.88	1.92	5.76
B70R08101_B70V08100	2.76	1.84	5.51
B70Y08100_B70V08100	2.39	1.60	4.79



Functional Unit

The functional unit for the study (per the PCR) is 1 m² of covered and protected floor surface over a building's Estimated Service Life (ESL) of 60 years. Armorseal 8100 Gloss products are installed in both commercial and industrial settings. Per the PCR, to achieve this functional unit, these products are modeled with the following Reference Service Life (RSL) scenarios: The RSL of Armorseal for all industrial applications is 5 years and commercial application is 10- or 15-years Market or Technical Service Life respectively. Table 1 shows the full product mass for all products and RSL scenarios covered in this EPD. Table 2 and Table 5 show additional details related to the functional unit and the components contained in the installed products noted in Table 1.

Table 2: Functional Unit Details

Component	Component Type	Mass per m ² Installation (kg)*
B70W08111	Part A	0.182
B70W08113		0.167
B70T08104		0.156
B70A08101		0.172
B70A08100		0.175
B70R08100		0.177
B70B08100		0.157
B70R08101		0.146
B70Y08100		0.116
B70V08100	Part B	0.0384

*Mass of product only (no packaging) including 2% installation scrap rate. Note that these masses are per a single layer of product. Armorseal 8100 products are generally applied as two layers of identical composition.

Table 3: Material composition of Armorseal 8100 Gloss components

	B70W08111	B70W08113	B70T08104	B70A08101	B70A08100	B70R08100	B70B08100	B70R08101	B70Y08100	B70V08100
Coalescing Agent	1%	2%	2%	2%	2%	0%	0%	0%	2%	0%
Curing agent	0%	0%	0%	0%	0%	0%	0%	0%	0%	44%
Defoamer	0%	0%	0%	0%	0%	0%	0%	1%	0%	1%
Dispersion	0%	0%	0%	1%	1%	1%	0%	0%	0%	0%
Epoxy Resin	65%	72%	79%	69%	68%	68%	77%	82%	86%	0%
Filler	0%	0%	0%	9%	7%	9%	0%	0%	0%	0%
Pigment	19%	9%	0%	6%	9%	8%	3%	0%	0%	0%
Polymer	2%	3%	3%	2%	2%	1%	3%	4%	4%	4%
Viscosity Agent	0%	0%	0%	0%	0%	2%	2%	2%	0%	1%
Water	11%	13%	15%	12%	12%	11%	15%	12%	7%	51%

*Table 4: List of hazardous materials in Armorseal 8100 Gloss formulas**

Ingredient	Percentage	CAS #
Epoxy Resin	0-50	69761-19-9
Titanium Dioxide	0-25	13463-67-7
Polypropylene glycol alkyl phenyl ether	0-1	9064-13-5
Poly(oxypropylene)diamine	0-3	9046-10-0
3,6,9-triazaundecamethylenediamine	0-1	100-51-6
Carbon Black	0-0.3	1333-86-4
Iron Oxide	0-10	1309-37-1

* Note: these materials may appear in as few as a single component formulation included in the products covered in this EPD.

Reference Service Life

According to the reference PCR, there are four RSL scenarios assigned to the product system according to the coating type and the product designed application. Table 5 provides the scenario details.

Table 5: Reference service life scenarios

PCR Scenario	Reference Service Life
Commercial Estimated Market Service Life	10 years
Commercial Estimated Technical Service Life	15 years
Industrial Estimated Market Service Life	5 years
Industrial Estimated Technical Service Life	5 years

* Note: these materials may appear in as few as a single component formulation included in the products covered in this EPD.

System Boundary

This LCA is a Cradle-to-Grave study. An overview of the system boundary is shown in Figure 1 and a summary of the life cycle stages included in this LCA is presented in Table 6.

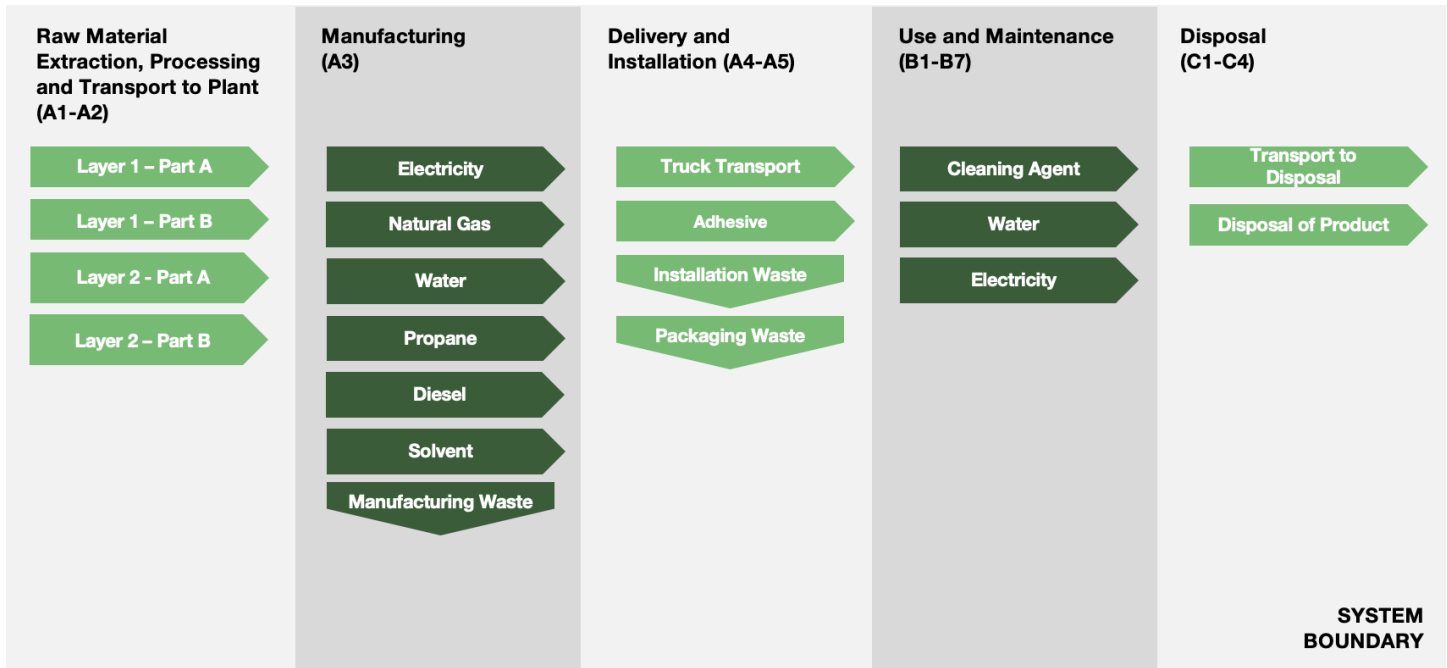


Figure 1: System Boundary Diagram

Table 6: Life Cycle Stages Included in the Study

Production			Construction		Use							End of Life				Benefits & Loads Beyond System Boundary
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw Material Supply	Transport	Manufacturing	Transport to Site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Deconstruction	Transport	Waste Processing	Disposal	Reuse, Recovery, Recycling Potential
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	ND

X = Module Included in LCA, ND = Module not Declared

Technical information and Scenarios

Table 7: Transport to Building Site (A4)

Parameter	Unit	Value
Vehicle Type	-	Heavy Heavy-duty Diesel Truck / 53,333 lb payload - 8b
Fuel Efficiency	L/100km	42
Fuel Type	-	Diesel
Distance	km	1,206
Capacity Utilization	%	67%
Weight of Products Transported	kg	0.797-1.06

Table 8: Installation Scenario Details (A5)

Parameter	Unit	Value
Product wastage	%	2
Waste materials at the construction site before waste processing, generated by product installation	kg	0.196-0.201
Packaging Waste to Landfill	kg	0.0133
Packaging Waste to Incineration	kg	0.0126
Packaging Waste to Recycling	kg	0.019
Biogenic carbon content of packaging	kg CO ₂	0.119

* Installation instructions can be found [here](#).

Table 9: Maintenance Scenario Details (B2)

Parameter	Unit	Value
Maintenance Process	-	Cleaning, manual*
Maintenance Cycle	#/ESL	220
Ancillary materials for maintenance: neutral floor cleaner	kg	26.99
Waste material resulting from maintenance: wastewater	kg	834
Net fresh water consumption during maintenance	m ³	0.833

*Per the PCR used in this study, the maintenance scenario includes daily cleaning via wet mopping with cleaning solution. For 1 m², this includes 220 cleanings using 1 gallon of water and 0.00313 gallons of a neutral cleaning solution. For this study it was assumed that any cleaning water was left on the flooring surface to dry meaning that there is no water sent to wastewater treatment as it is assumed to be 100% evaporated.

Table 10: Replacement Scenario Details (B4)

Parameter	Unit	Value
Replacement cycle	#/ESL	10-year RSL: 5 15-year RSL: 3 5-year RSL: 11

Table 11: End-of-Life Scenario Details (C1-C4)

Parameter	Unit	Value
Collected as mixed construction waste	kg	0.618-0.883
Waste to Landfill	kg	0.618-0.883
Distance to Landfill	km	11



Data Quality Assessment

Overall Data Quality

Overall data quality is considered good. The following sections provide more nuanced discussion of data quality as it pertains to the geographical, temporal, and time coverage of the data used in this study.

Geographical Coverage

The geographical scope of the manufacturing portion of the life cycle is United States. All primary data were collected from the manufacturer. The geographic coverage of primary data is considered very good.

The geographical scope of the raw material acquisition is North America. Customer distribution, site installation, and use portions of the life cycle is within North America.

In selecting secondary data (i.e., MLC Datasets), priority was given to the accuracy and representativeness of the data. When available and deemed of significant quality, country-specific data was used. However, priority was given to technological relevance and accuracy in selecting secondary data. This often led to the substitution of regional and/or global data for country-specific data. Overall geographic data quality is considered good.

Time Coverage

Primary data were provided by the manufacturer and represent all information for calendar year 2023. Using this data meets the PCR requirements. Time coverage of this primary data is considered very good.

Data necessary to model cradle-to-gate unit processes were sourced from Sphera's MLC LCI datasets. Time coverage of the MLC datasets varies from approximately 2010 to present. All datasets rely on at least one 1-year average data. Overall time coverage of the datasets is considered good and meets the requirement of the PCR that all data be updated within a 10- year period. Similarly to geographical coverage, priority was given to technological relevance and accuracy in selecting secondary data which resulted in the use of some datasets created outside of the typical 10-year window.

Technological Coverage

Primary data provided by the manufacturer is specific to the technology the company uses in manufacturing their product. It is site-specific and considered of good quality. It is worth noting that the energy and water used in manufacturing the product includes overhead energy such as lighting, heating, and sanitary use of water. Sub-metering was not available to extract process-only energy and water use from the total energy use. Sub-metering would improve the technological coverage of data quality.

Data necessary to model cradle-to-gate unit processes were sourced from MLC LCI datasets. Technological coverage of the datasets is considered good relative to the actual supply chain of the manufacturer. Given that the majority of materials used in Sherwin Williams resinous flooring products are pre-made chemical compositions of a proprietary nature LCA practitioners were forced to use available proxy datasets to model specific materials. While improved life cycle data from suppliers would improve technological coverage, the use of lower-quality generic and proxy datasets does meet the goal of this LCA.

Secondary Data

Whenever possible, primary data was used for all processes. When primary data did not exist, secondary data for raw material production, generic data was used from the MLC database.

Cut-off Criteria

Cumulative excluded material inputs, energy inputs, and environmental impacts must not exceed 5% based on total weight, energy use, or environmental impact of the functional unit. Inputs or outputs greater than 1% (based on total mass of the final product) were included within the scope of analysis. Material inputs less than 1% were included if sufficient data was available to warrant inclusion and/or the material input was thought to have significant environmental impact. Cumulative excluded material inputs and environmental impacts are less than 5% based on total weight and impact of the functional unit.

Life Cycle Assessment Results

All results are given per functional unit, which is 1 m² of covered and protected floor surface. Given the quantity of products included in this study, a selection of product results are presented in this section. Results for the highest impact and lowest GWP impact product configuration are presented in full herein with separate results for both products are reported for each RSL scenario applicable to that product. Note that the majority of other environmental impacts for these products trend with GWP. Additionally, IPCC AR6 Global Warming Potential (GWPe) results are presented for all products following the full results for the highest and lowest impact configurations. The highest impact configuration is B70W08111_B70V08100 and the lowest impact configuration is B70R08101_B70V08100.

Significant data limitations currently exist within the LCI data used to generate waste metrics for Life Cycle Assessments and Environmental Product Declarations. The waste metrics were calculated in a way conformant with the requirements of ISO 21930:2017, but these values represent rough estimates and are for informational purposes only. As such, no decisions regarding actual cradle-grave waste performance between products should be derived from these reported values.

Acronyms and LCIA methods included in the results tables are detailed in Table 12.

Table 12: Abbreviations and Impact Assessment Methods

Abbreviation	Name	Unit	Impact Assessment Method
<i>LCIA Results</i>			
GWP excl. bio C	Global warming potential (100 years, excluding biogenic CO ₂)	kg CO ₂ eq	IPCC AR6
GWP incl. bio C	Global warming potential (100 years, including biogenic CO ₂)	kg CO ₂ eq	IPCC AR6
AP	Acidification potential of soil and water	kg SO ₂ eq	TRACI 2.1
EP	Eutrophication potential	kg N eq	TRACI 2.1
ODP	Depletion of stratospheric ozone layer	kg CFC 11 eq	TRACI 2.1
SFP	Smog formation potential	kg O ₃ eq	TRACI 2.1
ADPF	Abiotic depletion potential for fossil fuel resources	MJ	CML 2001
<i>Carbon Emissions and Removals</i>			
BCRP	Biogenic Carbon Removal from Product	kg CO ₂	n/a
BCEP	Biogenic Carbon Emission from Product	kg CO ₂	n/a
BCRK	Biogenic Carbon Removal from Packaging	kg CO ₂	n/a
BCEK	Biogenic Carbon Emission from Packaging	kg CO ₂	n/a
BCEW	Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO ₂	n/a
CCE	Calcination Carbon Emissions	kg CO ₂	n/a
CCR	Carbonation Carbon Removals	kg CO ₂	n/a
CWNR	Carbon Emissions from Combustion of Waste from Non- Renewable Sources used in Production Processes	kg CO ₂	n/a
<i>Resource Use</i>			
RPR _E	Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	n/a
RPR _M	Use of renewable primary energy resources used as raw materials	MJ	n/a
NRPR _E	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	n/a
NRPR _M	Use of non-renewable primary energy resources used as raw materials	MJ	n/a
SM	Use of secondary materials	kg	n/a
RSF	Use of renewable secondary fuels	MJ	n/a
NRSF	Use of non-renewable secondary fuels	MJ	n/a
RE	Recovered energy	MJ	n/a
FW	Net use of fresh water	m ³	n/a

Abbreviation	Name	Unit	Impact Assessment Method
<i>Output Flows and Waste</i>			
HWD	Disposed-of-hazardous waste	kg	n/a
NHWD	Disposed-of non-hazardous waste	kg	n/a
HLRW	High-level radioactive waste, conditioned, to final repository	kg	n/a
ILLRW	Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	n/a
CRU	Components for reuse	kg	n/a
MR	Materials for recycling	kg	n/a
MER	Materials for energy recovery	kg	n/a
EEE	Exported electrical energy	MJ	n/a
EET	Exported thermal energy	MJ	n/a

Armorseal 8100 Gloss Highest Impact Product (B70W08111 B70V08100) Industrial Service Life Scenario – 5-yr RSL

The LCIA results presented below are for 1 m2 of Armorseal 8100 Gloss (**B70W08111 B70V08100**), 5-year Industrial RSL

Table 13: LCIA results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 5-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
IPCC AR6 Global Warming Potential														
GWPe [kg CO ₂ eq]	1.30E+00	7.52E-02	6.13E-02	0.00E+00	1.19E+01	0.00E+00	1.59E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.84E-04	0.00E+00	9.34E-03
GWPI [kg CO ₂ eq]	1.21E+00	7.53E-02	7.26E-02	0.00E+00	1.13E+01	0.00E+00	1.50E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.84E-04	0.00E+00	9.30E-03
TRACI LCIA Impacts (North America) and CML ADPf														
AP [kg SO ₂ eq]	3.42E-03	3.50E-04	1.59E-04	0.00E+00	1.97E-02	0.00E+00	4.37E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.09E-06	0.00E+00	4.85E-05
EP [kg N eq]	2.69E-04	3.11E-05	1.61E-05	0.00E+00	4.36E-03	0.00E+00	3.50E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E-07	0.00E+00	2.09E-06
ODP [kg CFC 11 eq]	9.08E-14	2.22E-16	1.99E-15	0.00E+00	3.56E-10	0.00E+00	1.03E-12	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E-18	0.00E+00	4.48E-16
SFP [kg O ₃ eq]	5.99E-02	8.04E-03	2.70E-02	0.00E+00	3.19E-01	0.00E+00	1.05E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-05	0.00E+00	8.67E-04
ADPf [MJ]	2.32E+01	9.88E-01	5.19E-01	0.00E+00	2.55E+02	0.00E+00	2.73E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.05E-03	0.00E+00	1.38E-01
Carbon Emissions and Uptake														
BCRP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK [kg CO ₂]	1.01E-01	0.00E+00	2.03E-03	0.00E+00	0.00E+00	0.00E+00	1.14E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK [kg CO ₂]	0.00E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	1.14E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The LCI results presented below are for 1 m2 of Armorseal 8100 Gloss (**B70W08111 B70V08100**), 5-year Industrial RSL

Table 14: Resource use, waste, and output flow results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 5-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Resource Use Indicators														
RPR _E [MJ]	2.17E+00	4.41E-02	5.07E-02	0.00E+00	2.54E+01	0.00E+00	2.51E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.25E-04	0.00E+00	1.76E-02
RPR _M [MJ]	8.75E-01	0.00E+00	1.75E-02	0.00E+00	0.00E+00	0.00E+00	9.81E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E [MJ]	2.28E+01	9.96E-01	5.17E-01	0.00E+00	2.67E+02	0.00E+00	2.69E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.09E-03	0.00E+00	1.42E-01
NRPR _M [MJ]	1.54E+00	0.00E+00	3.07E-02	0.00E+00	0.00E+00	0.00E+00	1.72E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	6.97E-03	1.46E-04	1.78E-04	0.00E+00	9.39E-01	0.00E+00	8.04E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.49E-07	0.00E+00	1.83E-05
Output Flows and Waste Categories														
HWD [kg]	4.25E-02	0.00E+00	8.50E-04	0.00E+00	0.00E+00	0.00E+00	4.77E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD [kg]	4.43E-03	0.00E+00	9.86E-02	0.00E+00	0.00E+00	0.00E+00	5.89E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.33E-01
HLRW [kg]	5.04E-07	3.56E-09	1.22E-08	0.00E+00	5.35E-06	0.00E+00	5.73E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.82E-11	0.00E+00	1.69E-09
ILLRW [kg]	4.22E-04	3.00E-06	1.02E-05	0.00E+00	4.41E-03	0.00E+00	4.80E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.53E-08	0.00E+00	1.51E-06
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR [kg]	0.00E+00	0.00E+00	3.80E-02	0.00E+00	0.00E+00	0.00E+00	4.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE [MJ]	7.59E-02	0.00E+00	3.44E-02	0.00E+00	0.00E+00	0.00E+00	1.21E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET [MJ]	1.39E-02	0.00E+00	1.34E-02	0.00E+00	0.00E+00	0.00E+00	3.00E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Armorseal 8100 Gloss Highest Impact Product (B70W08111 B70V08100) Commercial Market Service Life Scenario – 10-yr RSL

The LCIA results presented below are for 1 m2 of Armorseal 8100 Gloss **B70W08111 B70V08100**, 10-year Commercial Market Service Life RSL

Table 15: LCIA results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 10-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
IPCC AR6 Global Warming Potential														
GWPe [kg CO ₂ eq]	1.30E+00	7.52E-02	6.13E-02	0.00E+00	1.19E+01	0.00E+00	7.22E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.84E-04	0.00E+00	9.34E-03
GWPI [kg CO ₂ eq]	1.21E+00	7.53E-02	7.26E-02	0.00E+00	1.13E+01	0.00E+00	6.83E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.84E-04	0.00E+00	9.30E-03
TRACI LCIA Impacts (North America) and CML ADPf														
AP [kg SO ₂ eq]	3.42E-03	3.50E-04	1.59E-04	0.00E+00	1.97E-02	0.00E+00	1.99E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.09E-06	0.00E+00	4.85E-05
EP [kg N eq]	2.69E-04	3.11E-05	1.61E-05	0.00E+00	4.36E-03	0.00E+00	1.59E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E-07	0.00E+00	2.09E-06
ODP [kg CFC 11 eq]	9.08E-14	2.22E-16	1.99E-15	0.00E+00	3.56E-10	0.00E+00	4.67E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E-18	0.00E+00	4.48E-16
SFP [kg O ₃ eq]	5.99E-02	8.04E-03	2.70E-02	0.00E+00	3.19E-01	0.00E+00	4.79E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-05	0.00E+00	8.67E-04
ADPf [MJ]	3.09E+00	1.42E-01	6.89E-02	0.00E+00	3.51E+01	0.00E+00	1.66E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.24E-04	0.00E+00	1.84E-02
Carbon Emissions and Uptake														
BCRP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK [kg CO ₂]	1.01E-01	0.00E+00	2.03E-03	0.00E+00	0.00E+00	0.00E+00	5.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK [kg CO ₂]	0.00E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	5.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The LCI results presented below are for 1 m2 of Armorseal 8100 Gloss **B70W08111 B70V08100**, 10-year Commercial Market Service Life RSL

Table 16: Resource use, waste, and output flow results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 10-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Resource Use Indicators														
RPR _E [MJ]	2.17E+00	4.41E-02	5.07E-02	0.00E+00	2.54E+01	0.00E+00	1.14E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.25E-04	0.00E+00	1.76E-02
RPR _M [MJ]	8.75E-01	0.00E+00	1.75E-02	0.00E+00	0.00E+00	0.00E+00	4.46E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E [MJ]	2.28E+01	9.96E-01	5.17E-01	0.00E+00	2.67E+02	0.00E+00	1.22E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.09E-03	0.00E+00	1.42E-01
NRPR _M [MJ]	1.54E+00	0.00E+00	3.07E-02	0.00E+00	0.00E+00	0.00E+00	7.83E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	6.97E-03	1.46E-04	1.78E-04	0.00E+00	9.39E-01	0.00E+00	3.65E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.49E-07	0.00E+00	1.83E-05
Output Flows and Waste Categories														
HWD [kg]	4.25E-02	0.00E+00	8.50E-04	0.00E+00	0.00E+00	0.00E+00	2.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD [kg]	4.43E-03	0.00E+00	9.86E-02	0.00E+00	0.00E+00	0.00E+00	2.68E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.33E-01
HLRW [kg]	5.04E-07	3.56E-09	1.22E-08	0.00E+00	5.35E-06	0.00E+00	2.61E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.82E-11	0.00E+00	1.69E-09
ILLRW [kg]	4.22E-04	3.00E-06	1.02E-05	0.00E+00	4.41E-03	0.00E+00	2.18E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.53E-08	0.00E+00	1.51E-06
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR [kg]	0.00E+00	0.00E+00	3.80E-02	0.00E+00	0.00E+00	0.00E+00	1.90E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE [MJ]	7.59E-02	0.00E+00	3.44E-02	0.00E+00	0.00E+00	0.00E+00	5.52E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET [MJ]	1.39E-02	0.00E+00	1.34E-02	0.00E+00	0.00E+00	0.00E+00	1.37E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Armorseal 8100 Gloss Highest Impact Product (B70W08111 B70V08100) Commercial Technical Service Life Scenario – 15-yr RSL

The LCIA results presented below are for 1 m2 of Armorseal 8100 Gloss **B70W08111 B70V08100**, 15-year Commercial Technical Service Life RSL

Table 17: LCIA results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 15-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
IPCC AR6 Global Warming Potential														
GWPe [kg CO ₂ eq]	1.30E+00	7.52E-02	6.13E-02	0.00E+00	1.19E+01	0.00E+00	4.33E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.84E-04	0.00E+00	9.34E-03
GWPI [kg CO ₂ eq]	1.21E+00	7.53E-02	7.26E-02	0.00E+00	1.13E+01	0.00E+00	4.10E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.84E-04	0.00E+00	9.30E-03
TRACI LCIA Impacts (North America) and CML ADPf														
AP [kg SO ₂ eq]	3.42E-03	3.50E-04	1.59E-04	0.00E+00	1.97E-02	0.00E+00	1.19E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.09E-06	0.00E+00	4.85E-05
EP [kg N eq]	2.69E-04	3.11E-05	1.61E-05	0.00E+00	4.36E-03	0.00E+00	9.55E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E-07	0.00E+00	2.09E-06
ODP [kg CFC 11 eq]	9.08E-14	2.22E-16	1.99E-15	0.00E+00	3.56E-10	0.00E+00	2.80E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E-18	0.00E+00	4.48E-16
SFP [kg O ₃ eq]	5.99E-02	8.04E-03	2.70E-02	0.00E+00	3.19E-01	0.00E+00	2.87E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-05	0.00E+00	8.67E-04
ADPf [MJ]	3.09E+00	1.42E-01	6.89E-02	0.00E+00	3.51E+01	0.00E+00	9.96E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.24E-04	0.00E+00	1.84E-02
Carbon Emissions and Uptake														
BCRP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK [kg CO ₂]	1.01E-01	0.00E+00	2.03E-03	0.00E+00	0.00E+00	0.00E+00	3.10E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK [kg CO ₂]	0.00E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	3.10E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The LCI results presented below are for 1 m2 of Armorseal 8100 Gloss **B70W08111 B70V08100**, 15-year Commercial Technical Service Life RSL

Table 18: Resource use, waste, and output flow results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 15-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Resource Use Indicators														
RPR _E [MJ]	2.17E+00	4.41E-02	5.07E-02	0.00E+00	2.54E+01	0.00E+00	6.83E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.25E-04	0.00E+00	1.76E-02
RPR _M [MJ]	8.75E-01	0.00E+00	1.75E-02	0.00E+00	0.00E+00	0.00E+00	2.68E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E [MJ]	2.28E+01	9.96E-01	5.17E-01	0.00E+00	2.67E+02	0.00E+00	7.35E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.09E-03	0.00E+00	1.42E-01
NRPR _M [MJ]	1.54E+00	0.00E+00	3.07E-02	0.00E+00	0.00E+00	0.00E+00	4.70E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	6.97E-03	1.46E-04	1.78E-04	0.00E+00	9.39E-01	0.00E+00	2.19E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.49E-07	0.00E+00	1.83E-05
Output Flows and Waste Categories														
HWD [kg]	4.25E-02	0.00E+00	8.50E-04	0.00E+00	0.00E+00	0.00E+00	1.30E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD [kg]	4.43E-03	0.00E+00	9.86E-02	0.00E+00	0.00E+00	0.00E+00	1.61E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.33E-01
HLRW [kg]	5.04E-07	3.56E-09	1.22E-08	0.00E+00	5.35E-06	0.00E+00	1.56E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.82E-11	0.00E+00	1.69E-09
ILLRW [kg]	4.22E-04	3.00E-06	1.02E-05	0.00E+00	4.41E-03	0.00E+00	1.31E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.53E-08	0.00E+00	1.51E-06
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR [kg]	0.00E+00	0.00E+00	3.80E-02	0.00E+00	0.00E+00	0.00E+00	1.14E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE [MJ]	7.59E-02	0.00E+00	3.44E-02	0.00E+00	0.00E+00	0.00E+00	3.31E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET [MJ]	1.39E-02	0.00E+00	1.34E-02	0.00E+00	0.00E+00	0.00E+00	8.20E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Armorseal 8100 Gloss Lowest Impact Product (B70R08101 B70V08100) Industrial Service Life Scenario – 5-yr RSL

The LCIA results presented below are for 1 m2 of Armorseal 8100 Gloss (**B70R08101 B70V08100**), 5-year Industrial RSL

Table 19: LCIA results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 5-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
IPCC AR6 Global Warming Potential														
GWPe [kg CO ₂ eq]	8.90E-01	6.51E-02	5.29E-02	0.00E+00	1.19E+01	0.00E+00	1.12E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.82E-03
GWPI [kg CO ₂ eq]	7.95E-01	6.51E-02	6.41E-02	0.00E+00	1.13E+01	0.00E+00	1.03E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.78E-03
TRACI LCIA Impacts (North America) and CML ADPf														
AP [kg SO ₂ eq]	1.66E-03	3.02E-04	1.23E-04	0.00E+00	1.97E-02	0.00E+00	2.34E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.15E-07	0.00E+00	4.06E-05
EP [kg N eq]	2.04E-04	2.69E-05	1.47E-05	0.00E+00	4.36E-03	0.00E+00	2.72E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.58E-08	0.00E+00	1.75E-06
ODP [kg CFC 11 eq]	7.59E-14	1.92E-16	1.69E-15	0.00E+00	3.56E-10	0.00E+00	8.60E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.51E-19	0.00E+00	3.75E-16
SFP [kg O ₃ eq]	3.60E-02	6.96E-03	2.65E-02	0.00E+00	3.19E-01	0.00E+00	7.73E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.07E-05	0.00E+00	7.25E-04
ADPf [MJ]	1.78E+01	8.54E-01	4.08E-01	0.00E+00	2.55E+02	0.00E+00	2.11E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.23E-03	0.00E+00	1.15E-01
Carbon Emissions and Uptake														
BCRP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK [kg CO ₂]	1.01E-01	0.00E+00	2.03E-03	0.00E+00	0.00E+00	0.00E+00	1.14E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK [kg CO ₂]	0.00E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	1.14E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The LCI results presented below are for 1 m2 of Armorseal 8100 Gloss (**B70R08101 B70V08100**), 5-year Industrial RSL

Table 20: Resource use, waste, and output flow results for Armorseal 8100 Gloss **B70W08111 B70V08100**, per functional unit 5-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Resource Use Indicators														
RPR _E [MJ]	1.70E+00	3.81E-02	4.12E-02	0.00E+00	2.54E+01	0.00E+00	1.97E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.89E-04	0.00E+00	1.47E-02
RPR _M [MJ]	8.75E-01	0.00E+00	1.75E-02	0.00E+00	0.00E+00	0.00E+00	9.81E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E [MJ]	1.71E+01	8.61E-01	3.99E-01	0.00E+00	2.67E+02	0.00E+00	2.03E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.26E-03	0.00E+00	1.19E-01
NRPR _M [MJ]	1.53E+00	0.00E+00	3.07E-02	0.00E+00	0.00E+00	0.00E+00	1.72E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	4.16E-03	1.27E-04	1.21E-04	0.00E+00	9.39E-01	0.00E+00	4.87E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.27E-07	0.00E+00	1.53E-05
Output Flows and Waste Categories														
HWD [kg]	4.25E-02	0.00E+00	8.50E-04	0.00E+00	0.00E+00	0.00E+00	4.77E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD [kg]	4.43E-03	0.00E+00	9.72E-02	0.00E+00	0.00E+00	0.00E+00	5.10E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.62E-01
HLRW [kg]	3.64E-07	3.08E-09	9.42E-09	0.00E+00	5.35E-06	0.00E+00	4.16E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.52E-11	0.00E+00	1.41E-09
ILLRW [kg]	3.05E-04	2.59E-06	7.89E-06	0.00E+00	4.41E-03	0.00E+00	3.48E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.28E-08	0.00E+00	1.26E-06
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR [kg]	0.00E+00	0.00E+00	3.80E-02	0.00E+00	0.00E+00	0.00E+00	4.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE [MJ]	7.59E-02	0.00E+00	3.44E-02	0.00E+00	0.00E+00	0.00E+00	1.21E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET [MJ]	1.39E-02	0.00E+00	1.34E-02	0.00E+00	0.00E+00	0.00E+00	3.00E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Armorseal 8100 Gloss Lowest Impact Product (B70R08101 B70V08100) Commercial Market Service Life Scenario – 10-yr RSL

The LCIA results presented below are for 1 m2 of Armorseal 8100 Gloss **B70R08101 B70V08100**, 10-year Commercial Market Service Life RSL

Table 21: LCIA results for Armorseal 8100 Gloss **B70R08101 B70V08100**, per functional unit 10-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
IPCC AR6 Global Warming Potential														
GWPe [kg CO ₂ eq]	8.90E-01	6.51E-02	5.29E-02	0.00E+00	1.19E+01	0.00E+00	5.08E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.82E-03
GWPI [kg CO ₂ eq]	7.95E-01	6.51E-02	6.41E-02	0.00E+00	1.13E+01	0.00E+00	4.66E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.78E-03
TRACI LCIA Impacts (North America) and CML ADPf														
AP [kg SO ₂ eq]	1.66E-03	3.02E-04	1.23E-04	0.00E+00	1.97E-02	0.00E+00	1.06E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.15E-07	0.00E+00	4.06E-05
EP [kg N eq]	2.04E-04	2.69E-05	1.47E-05	0.00E+00	4.36E-03	0.00E+00	1.24E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.58E-08	0.00E+00	1.75E-06
ODP [kg CFC 11 eq]	7.59E-14	1.92E-16	1.69E-15	0.00E+00	3.56E-10	0.00E+00	3.91E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.51E-19	0.00E+00	3.75E-16
SFP [kg O ₃ eq]	3.60E-02	6.96E-03	2.65E-02	0.00E+00	3.19E-01	0.00E+00	3.51E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.07E-05	0.00E+00	7.25E-04
ADPf [MJ]	2.38E+00	1.23E-01	5.44E-02	0.00E+00	3.51E+01	0.00E+00	1.29E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.06E-04	0.00E+00	1.54E-02
Carbon Emissions and Uptake														
BCRP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK [kg CO ₂]	1.01E-01	0.00E+00	2.03E-03	0.00E+00	0.00E+00	0.00E+00	5.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK [kg CO ₂]	0.00E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	5.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The LCI results presented below are for 1 m2 of Armorseal 8100 Gloss **B70R08101 B70V08100**, 10-year Commercial Market Service Life RSL

Table 22: Resource use, waste, and output flow results for Armorseal 8100 Gloss **B70R08101 B70V08100**, per functional unit 10-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Resource Use Indicators														
RPR _E [MJ]	1.70E+00	3.81E-02	4.12E-02	0.00E+00	2.54E+01	0.00E+00	8.97E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.89E-04	0.00E+00	1.47E-02
RPR _M [MJ]	8.75E-01	0.00E+00	1.75E-02	0.00E+00	0.00E+00	0.00E+00	4.46E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E [MJ]	1.71E+01	8.61E-01	3.99E-01	0.00E+00	2.67E+02	0.00E+00	9.24E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.26E-03	0.00E+00	1.19E-01
NRPR _M [MJ]	1.53E+00	0.00E+00	3.07E-02	0.00E+00	0.00E+00	0.00E+00	7.82E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	4.16E-03	1.27E-04	1.21E-04	0.00E+00	9.39E-01	0.00E+00	2.21E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.27E-07	0.00E+00	1.53E-05
Output Flows and Waste Categories														
HWD [kg]	4.25E-02	0.00E+00	8.50E-04	0.00E+00	0.00E+00	0.00E+00	2.17E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD [kg]	4.43E-03	0.00E+00	9.72E-02	0.00E+00	0.00E+00	0.00E+00	2.32E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.62E-01
HLRW [kg]	3.64E-07	3.08E-09	9.42E-09	0.00E+00	5.35E-06	0.00E+00	1.89E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.52E-11	0.00E+00	1.41E-09
ILLRW [kg]	3.05E-04	2.59E-06	7.89E-06	0.00E+00	4.41E-03	0.00E+00	1.58E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.28E-08	0.00E+00	1.26E-06
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR [kg]	0.00E+00	0.00E+00	3.80E-02	0.00E+00	0.00E+00	0.00E+00	1.90E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE [MJ]	7.59E-02	0.00E+00	3.44E-02	0.00E+00	0.00E+00	0.00E+00	5.52E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET [MJ]	1.39E-02	0.00E+00	1.34E-02	0.00E+00	0.00E+00	0.00E+00	1.37E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Armorseal 8100 Gloss Lowest Impact Product (B70R08101 B70V08100) Commercial Technical Service Life Scenario – 15-yr RSL

The LCIA results presented below are for 1 m2 of Armorseal 8100 Gloss **B70R08101 B70V08100**, 15-year Commercial Technical Service Life RSL

Table 23: LCIA results for Armorseal 8100 Gloss **B70R08101 B70V08100**, per functional unit 15-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
IPCC AR6 Global Warming Potential														
GWPe [kg CO ₂ eq]	8.90E-01	6.51E-02	5.29E-02	0.00E+00	1.19E+01	0.00E+00	3.05E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.82E-03
GWPI [kg CO ₂ eq]	7.95E-01	6.51E-02	6.41E-02	0.00E+00	1.13E+01	0.00E+00	2.80E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.78E-03
TRACI LCIA Impacts (North America) and CML ADPf														
AP [kg SO ₂ eq]	1.66E-03	3.02E-04	1.23E-04	0.00E+00	1.97E-02	0.00E+00	6.38E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.15E-07	0.00E+00	4.06E-05
EP [kg N eq]	2.04E-04	2.69E-05	1.47E-05	0.00E+00	4.36E-03	0.00E+00	7.42E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.58E-08	0.00E+00	1.75E-06
ODP [kg CFC 11 eq]	7.59E-14	1.92E-16	1.69E-15	0.00E+00	3.56E-10	0.00E+00	2.35E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.51E-19	0.00E+00	3.75E-16
SFP [kg O ₃ eq]	3.60E-02	6.96E-03	2.65E-02	0.00E+00	3.19E-01	0.00E+00	2.11E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.07E-05	0.00E+00	7.25E-04
ADPf [MJ]	2.38E+00	1.23E-01	5.44E-02	0.00E+00	3.51E+01	0.00E+00	7.73E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.06E-04	0.00E+00	1.54E-02
Carbon Emissions and Uptake														
BCRP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK [kg CO ₂]	1.01E-01	0.00E+00	2.03E-03	0.00E+00	0.00E+00	0.00E+00	3.10E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK [kg CO ₂]	0.00E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	3.10E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR [kg CO ₂]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The LCI results presented below are for 1 m2 of Armorseal 8100 Gloss **B70R08101 B70V08100**, 15-year Commercial Technical Service Life RSL

Table 24: Resource use, waste, and output flow results for Armorseal 8100 Gloss **B70R08101 B70V08100**, per functional unit 15-year RSL

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Resource Use Indicators														
RPR _E [MJ]	1.70E+00	3.81E-02	4.12E-02	0.00E+00	2.54E+01	0.00E+00	5.38E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.89E-04	0.00E+00	1.47E-02
RPR _M [MJ]	8.75E-01	0.00E+00	1.75E-02	0.00E+00	0.00E+00	0.00E+00	2.68E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E [MJ]	1.71E+01	8.61E-01	3.99E-01	0.00E+00	2.67E+02	0.00E+00	5.54E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.26E-03	0.00E+00	1.19E-01
NRPR _M [MJ]	1.53E+00	0.00E+00	3.07E-02	0.00E+00	0.00E+00	0.00E+00	4.69E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	4.16E-03	1.27E-04	1.21E-04	0.00E+00	9.39E-01	0.00E+00	1.33E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.27E-07	0.00E+00	1.53E-05
Output Flows and Waste Categories														
HWD [kg]	4.25E-02	0.00E+00	8.50E-04	0.00E+00	0.00E+00	0.00E+00	1.30E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD [kg]	4.43E-03	0.00E+00	9.72E-02	0.00E+00	0.00E+00	0.00E+00	1.39E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.62E-01
HLRW [kg]	3.64E-07	3.08E-09	9.42E-09	0.00E+00	5.35E-06	0.00E+00	1.13E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.52E-11	0.00E+00	1.41E-09
ILLRW [kg]	3.05E-04	2.59E-06	7.89E-06	0.00E+00	4.41E-03	0.00E+00	9.50E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.28E-08	0.00E+00	1.26E-06
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR [kg]	0.00E+00	0.00E+00	3.80E-02	0.00E+00	0.00E+00	0.00E+00	1.14E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE [MJ]	7.59E-02	0.00E+00	3.44E-02	0.00E+00	0.00E+00	0.00E+00	3.31E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET [MJ]	1.39E-02	0.00E+00	1.34E-02	0.00E+00	0.00E+00	0.00E+00	8.20E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

In addition to the full results presented for the highest and lowest impact product configurations presented above, IPCC AR6 GWPe values are presented herein for all other product configurations covered by this EPD.

Armorseal 8100 Gloss Non-Reference Product IPCC AR6 GWPe Results- Industrial Service Life Scenario – 5-yr RSL

Product	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
B70W08113_B70V08100	1.07E+00	7.09E-02	5.67E-02	0.00E+00	1.19E+01	0.00E+00	1.33E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.57E-04	0.00E+00	8.70E-03
B70T08104_B70V08100	9.16E-01	6.78E-02	5.35E-02	0.00E+00	1.19E+01	0.00E+00	1.15E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.38E-04	0.00E+00	8.23E-03
B70A08101_B70V08100	1.01E+00	7.24E-02	5.55E-02	0.00E+00	1.19E+01	0.00E+00	1.27E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.66E-04	0.00E+00	8.92E-03
B70A08100_B70V08100	1.08E+00	7.31E-02	5.69E-02	0.00E+00	1.19E+01	0.00E+00	1.34E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.70E-04	0.00E+00	9.02E-03
B70R08100_B70V08100	1.01E+00	7.37E-02	5.54E-02	0.00E+00	1.19E+01	0.00E+00	1.26E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.74E-04	0.00E+00	9.10E-03
B70B08100_B70V08100	9.23E-01	6.80E-02	5.36E-02	0.00E+00	1.19E+01	0.00E+00	1.16E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.39E-04	0.00E+00	8.26E-03
B70Y08100_B70V08100	9.24E-01	6.51E-02	5.36E-02	0.00E+00	1.19E+01	0.00E+00	1.16E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.82E-03

Armorseal 8100 Gloss Non-Reference Product IPCC AR6 GWPe Results- Commercial Market Service Life Scenario – 10-yr RSL

Product	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
B70W08113_B70V08100	1.07E+00	7.09E-02	5.67E-02	0.00E+00	1.19E+01	0.00E+00	6.05E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.57E-04	0.00E+00	8.70E-03
B70T08104_B70V08100	9.16E-01	6.78E-02	5.35E-02	0.00E+00	1.19E+01	0.00E+00	5.23E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.38E-04	0.00E+00	8.23E-03
B70A08101_B70V08100	1.01E+00	7.24E-02	5.55E-02	0.00E+00	1.19E+01	0.00E+00	5.75E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.66E-04	0.00E+00	8.92E-03
B70A08100_B70V08100	1.08E+00	7.31E-02	5.69E-02	0.00E+00	1.19E+01	0.00E+00	6.10E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.70E-04	0.00E+00	9.02E-03
B70R08100_B70V08100	1.01E+00	7.37E-02	5.54E-02	0.00E+00	1.19E+01	0.00E+00	5.72E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.74E-04	0.00E+00	9.10E-03
B70B08100_B70V08100	9.23E-01	6.80E-02	5.36E-02	0.00E+00	1.19E+01	0.00E+00	5.27E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.39E-04	0.00E+00	8.26E-03
B70Y08100_B70V08100	9.24E-01	6.51E-02	5.36E-02	0.00E+00	1.19E+01	0.00E+00	5.26E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.82E-03

Armorseal 8100 Gloss Non-Reference Product IPCC AR6 GWPe Results- Commercial Technical Service Life Scenario – 15-yr RSL

Product	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
B70W08113_B70V08100	1.07E+00	7.09E-02	5.67E-02	0.00E+00	1.19E+01	0.00E+00	3.63E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.57E-04	0.00E+00	8.70E-03
B70T08104_B70V08100	9.16E-01	6.78E-02	5.35E-02	0.00E+00	1.19E+01	0.00E+00	3.14E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.38E-04	0.00E+00	8.23E-03
B70A08101_B70V08100	1.01E+00	7.24E-02	5.55E-02	0.00E+00	1.19E+01	0.00E+00	3.45E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.66E-04	0.00E+00	8.92E-03
B70A08100_B70V08100	1.08E+00	7.31E-02	5.69E-02	0.00E+00	1.19E+01	0.00E+00	3.66E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.70E-04	0.00E+00	9.02E-03
B70R08100_B70V08100	1.01E+00	7.37E-02	5.54E-02	0.00E+00	1.19E+01	0.00E+00	3.43E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.74E-04	0.00E+00	9.10E-03
B70B08100_B70V08100	9.23E-01	6.80E-02	5.36E-02	0.00E+00	1.19E+01	0.00E+00	3.16E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.39E-04	0.00E+00	8.26E-03
B70Y08100_B70V08100	9.24E-01	6.51E-02	5.36E-02	0.00E+00	1.19E+01	0.00E+00	3.15E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.21E-04	0.00E+00	7.82E-03

Interpretation

For both the highest and lowest impact products, the majority of environmental impact comes from modules B2 and B4 reprCesenting the maintenance and replacements over the building's ESL. Depending on the indicator, modules B2 and B4 contribute more or less to overall impacts (e.g., for Smog Air B4 contributes relatively more whereas for EP B2 contributes relatively more. The majority of A1-A3 impact across all indicators comes from the A1 module. A1 GWPe for this product is driven by epoxy resins and pigments, material groups that cumulatively make up the majority of the mass of these products. Note that Figure 2 and Figure 3 show results for the highest impact product configuration only. The same trends illustrated here also hold true for the lowest impact product; however, graphs for the lowest impact product were excluded for the sake of brevity.

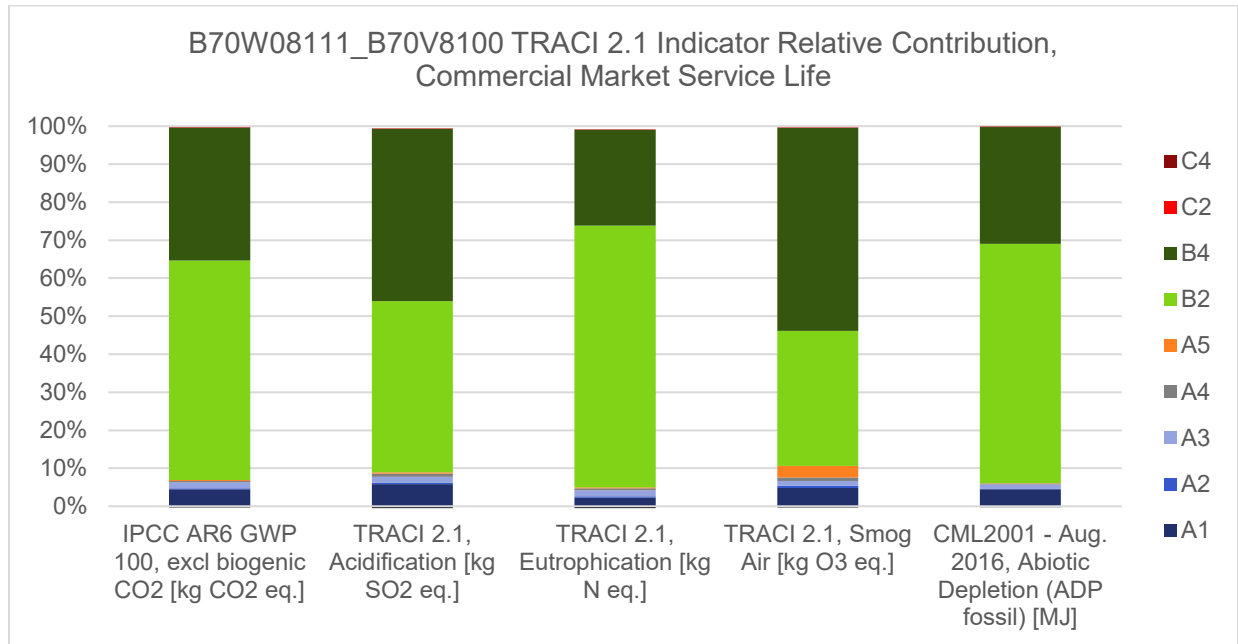


Figure 2: Contribution analysis for highest impact Armorseal 8100 Gloss product, Commercial Market Service Life

Figure 3 shows the GWPe results across RSL scenarios for the highest impact Armorseal 8100 Gloss product. Each RSL scenario denotes a different number of product replacements to achieve the functional unit. Given the significance of the B4 module to overall results, changes to this module have tangible impacts on overall LCA results. As illustrated in this figure, increasing the RSL of the products under study decreases B4 impacts.

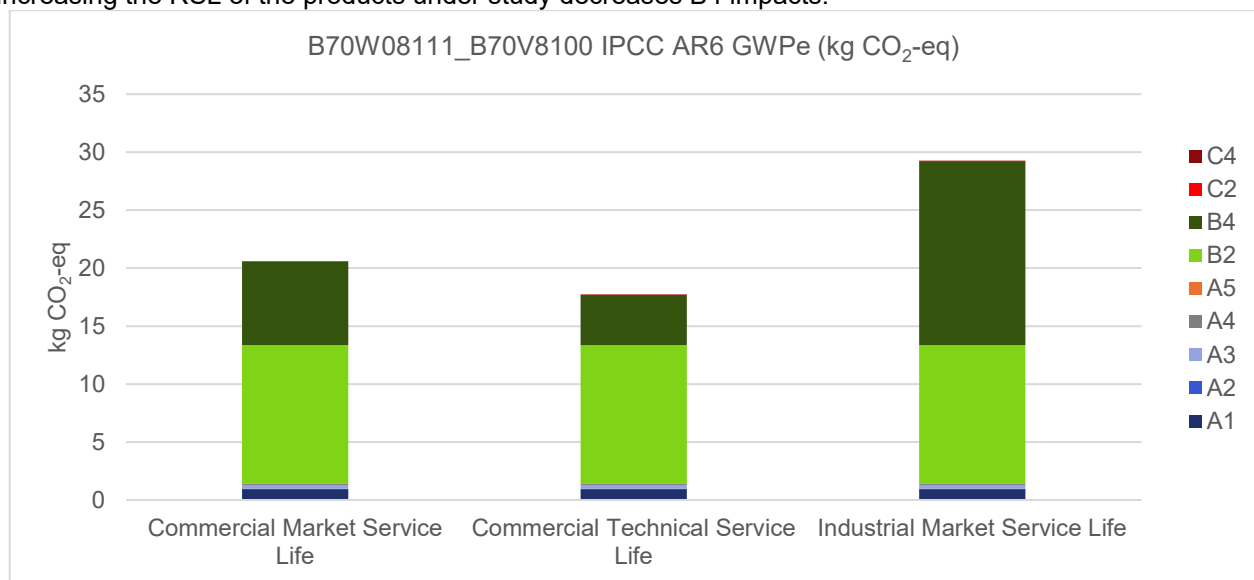


Figure 3: B70W08111_B70V8100 IPCC AR6 GWPe Impacts for all RSL Scenarios

Additional Environmental Information

Emissions Testing Standard	
CDPH v1.2	Standard method for the testing and evaluation of volatile organic emission from indoor sources using environmental chambers.

Component	Component Type	VOC Content	
B70W08111	Part A	<50g/l	Determined by EPA VOC Regulatory Calculation
B70W08113		<50g/l	
B70T08104		<50g/l	
B70A08101		<50g/l	
B70A08100		<50g/l	
B70R08100		<50g/l	
B70B08100		<50g/l	
B70R08101		<50g/l	
B70Y08100		<50g/l	
B70V08100	Part B	<50g/l	

References

1. CML Department of Industrial Ecology. (2016, September 5). *CML-IA Characterization factors*. Retrieved from <https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisation-factors>
2. LCA Report of Sherwin Williams Resinous Flooring Products, WAP Sustainability, June 2025
3. IPCC. (2021). *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*. [Masson-Delmotte, V., P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T.K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, and B. Zhou (eds.)]. Cambridge University Press. In Press.
4. ISO. (2006). ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures. Geneva: International Organization for Standardization.
5. ISO. (2006). ISO 14040/Amd 1:2020: Environmental management - Life cycle assessment - Principles and framework. Geneva: International Organization for Standardization.
6. ISO. (2006). ISO 14044/Amd 1:2017/Amd 2:2020: Environmental Management - Life cycle assessment - Requirements and Guidelines. Geneva: International Organization for Standardization.
7. ISO. (2017). ISO 21930: Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services. Geneva: International Organization for Standardization.
8. NSF International. (2018). PCR for Resinous Floor Coatings.
9. US EPA. (2012). TRACI: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts. Version 2.1 - User Guide. Retrieved from <https://nepis.epa.gov/Adobe/PDF/P100HN53.pdf>