



Tone™ Height-Adjustable Table

Americas

Environmental Product Declaration

Date of Issue: November 11, 2025

Date of Expiration: November 11, 2030

Product Category Rules

BIFMA PCR for Tables, UNCPC 3812, version 1

Product Sub-Category: Single User – Height Adjustable Table

EN 15804+A2

ISO 14025/14040/14044

Functional Unit

1 m² maintained for a 10-year period (0.92 Tone Height-Adjustable Tables)

This EPD was not written to support comparative assertions. EPDs based on different PCRs or different calculation models may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results due to and not limited to the practitioner's assumptions, the source of the data used in the study, the specifics of the product modeled, and the software tool used to conduct the study.

Tone Height-Adjustable Table

Program Operator	NSF Certification LLC 789 N. Dixboro, Ann Arbor, MI 48105 www.nsf.org	
EPD Owner Name and Address	MillerKnoll 855 East Main Ave, PO Box 302 Zeeland, MI 49464	
Declaration Number	EPD11180	
Declared Product and Functional Unit	Tone Height-Adjustable Table (product codes TTDR5829N – table top, TBCEAM28 – stand) Functional Unit: 1 m ² of physical floor space maintained for 10 years	
Reference PCR and Version Number	BIFMA PCR for Tables: UNCPC 3812, version 1 EN 15804+A2	
Product's intended Application and Use	Single User – Height Adjustable Table	
Product RSL	10 years	
Markets of Applicability	North America/ Latin America	
Date of Issue	November 11, 2025	
Period of Validity	5 years from date of issue	
EPD Type	Product Specific	
Intended Audience	Business-to-Business, Business-to-Consumer	
Range of Dataset Variability	N/A	
EPD Scope	Cradle to Grave	
Year of reported manufacturer primary data	2021	
LCA Software and Version Number	Sphera LCA for Experts (fka GaBi) 10.9	
LCI Database and Version Number	Sphera Managed LCA Content (fka GaBi) Database, 2024.1	
LCIA Methodology and Version Number	TRACI 2.1, IPCC AR6, EN 15804 EF 3.1	
The PCR review was conducted by:	Review Panel Chaired by Dr. Thomas Gloria	
This declaration was independently verified in accordance with ISO 14025: 2006, the BIFMA PCR for Tables, and EN 15804+A2 ☐ Internal ☒ External	Jack Geibig - EcoForm jgeibig@ecoform.com	
This reference life cycle assessment was conducted in accordance with ISO 14044 and the reference PCRs:	WAP Sustainability	
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	Jack Geibig - EcoForm jgeibig@ecoform.com	
References	BIFMA PCR for Tables: UNCPC 3812, Version 1 (2021) EN 15804+A2 (2019) ISO 14025/40/44 (2006) MillerKnoll Background Report for LCA/EPD Creation Tool v1.0	
Limitations: Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance of Products using EPD information shall be based on the product's use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under this PCR. Full conformance with the PCR for Products allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible". Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.		

Tone Height-Adjustable Table

Product Description

Designed by Antenna Design

Tone is a complete line of sleek height-adjustable tables that responds to the way we work today, delivering user adjustability and ergonomics. Designed by Antenna Design, Tone is available in the full range of Knoll paint, laminate and veneer finishes with the choice of electric, handcrank, fixed, pin-set 90° and 120° adjustment and planning options.

This document relates to Tone Height-Adjustable tables. Tone Height-Adjustable Table at 42.1" height with a 29" deep and 58" wide Dividends Horizon Deep Rectangular worksurface top, 30" deep standard electric adjustable width C-leg base for use with 42"-78" width tops is covered in this document.



Company Description

MillerKnoll is a collective of dynamic brands that comes together to design the world we live in. The MillerKnoll brand portfolio includes Herman Miller, Knoll, Colebrook Bosson Saunders, DatesWeiser, Design Within Reach, Edelman, Geiger, HAY, HOLLY HUNT, Knoll Textiles, Maharam, Muuto, NaughtOne, and Spinneybeck|FilzFelt. MillerKnoll is an unparalleled platform that redefines modern for the 21st century by building a more sustainable, equitable, and beautiful future for all.

At the intersection of people and environments, there's Knoll. Founded in 1938, the company's creative collaborations with the most influential architects and designers of the day have yielded an unmatched portfolio of timeless products for the office, hospitality and home. Knoll was built on its belief that when furniture, interiors and architecture are designed harmoniously, we create spaces where people want to be. Knoll is part of MillerKnoll, a collective of the world's most dynamic design brands.

Our Mission

Driven by the mission to design and make the world's best products in the most sustainable way, MillerKnoll's sustainability strategy focuses on three key areas:

- **Carbon**
Design the lowest carbon footprint products and commit to achieving net-zero carbon emissions by 2050.¹
- **Materials**
Use sustainable, 100% bio-based or recycled materials by 2050.
- **Circularity**
Design timeless, durable products with zero waste by 2050.

Supplier Support

At MillerKnoll, we are committed to working closely with our suppliers to reduce our collective impact on the environment. We encourage our suppliers to minimize their operations' environmental impacts and require they assist us in decreasing our facilities' environmental effects.

Manufacturing Locations

- East Greenville, PA, United States

Warranty

Backed by MillerKnoll's 10-year warranty on base, mechanical, and electrical components.

Creating Transparency on Materials

We are transparent about our materials because we believe in informed decisions. Our Ecomedes platform provides environmental product information from across our brands, including details about materials used and third-party certifications. This resource helps customers buy or specify environmentally preferable products by supplying product-level data and automating product performance calculations that can help contribute to sustainability goals. Ecomedes is linked here.

Product Environmental Data

	Value*
Recycled Content %	46%
Pre-Consumer	36%
Post-Consumer	9%
Recyclability (max %) **	54%

*The recycled content information shown may vary from ecomedes due to periodic product updates.

**This recyclability rate is the maximum amount of the product that is recyclable, based on availability of recycling facilities and ability of the product to be disassembled. Note that, per the requirements of the PCR, the End-of-Life results presented in this EPD were calculated using the US EPA's recycling rates within the 2018 Municipal Solid Waste Report for parts that can be disassembled.

Improper Disposal

MillerKnoll provides disassembly guidelines and encourages our end customers to either recycle or donate the products at the end-of-life. This can be accomplished through our dedicated takeback initiative (rePurpose) or by engaging with a nearby community recyclers. In situations where recycling isn't a viable option, we advise adhering to jurisdictional requirements for either incineration or landfill based on your local regulatory requirements.

Additional information, including installation and recycling instructions, can be found at <https://www.knoll.com/design-plan/product/tone-height-adjustable-tables>.

¹ MillerKnoll's net-zero commitment is subject to factors that are partly outside its control, including its value chain's ability to reduce their Scope 1 and 2 emissions (and therefore MillerKnoll's Scope 3 emissions) by 2050. In light of this, MillerKnoll is committed to achieving net-zero by 2050 and will continue to engage with stakeholders across its value chain to support them in their efforts to become net-zero by 2050.

Tone Height-Adjustable Table

MATERIAL DECLARATION

Functional Unit

The functional unit is one m² of physical floor space, maintained over a 10-year period, including packaging materials used for the final assembled product. One table is 1.09 m². The product has met ANSI/BIFMA X10.1 requirements for a 10-year lifetime, so no replacements are required. To meet the functional unit, 0.92 units of Tone Height-Adjustable Table are required.

Reference Flow and Product Specifications


One Tone Height-Adjustable Table (product numbers TTDR5829N (top) and TBCEAM28 (stand)) at 42.1" height with a 29" deep and 58" wide Dividends Horizon worksurface top for C-leg tables, 30" deep standard electric adjustable width C-leg base for use with 42"-78" width tops was modeled for this EPD. This table is determined to be a representative product based on sales of the variations. The results in this EPD are only representative of this configuration. While the exact configuration purchased may be slightly different, it is expected to have impacts within 10% of this representative configuration. The results presented on the subsequent pages consist of the impacts of Tone Height-Adjustable Table made at East Greenville, PA. The product composition table to the right is relevant for the product made in East Greenville, PA, United States.

System Boundary

Cradle-to-Grave

Content Declaration


The table to the right details the materials included in a specific SKU for the product made in the United States, summarized in the chart below. In order to achieve the functional unit, 0.92 products are required.

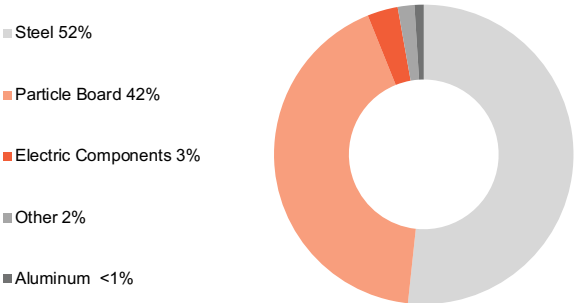

Material	Mass (kg)	Mass (%)	Resource
Steel	26.05	52%	Virgin Non-renewable and Recycled Content
Particle Board	21.27	42%	Virgin Renewable and Recycled Content
Electric Components	1.66	3%	Virgin Non-renewable
Other	0.91	2%	Virgin Non-renewable
Aluminum	0.50	<1%	Recycled Content

Packaging	Mass (kg)	Mass (%)	Resource
Corrugate	7.29	83%	Recycled Content
EPS	1.38	16%	Virgin Non-Renewable
PET Bag	0.14	2%	Virgin Non-Renewable
Total	8.81	100%	

This product contains no substances prohibited by the regulations applicable at the time of EPD publication, and does not contain substances that require registration under REACH. It respects the restrictions on use of hazardous substances as defined in the REACH directive EC 1907/2006.

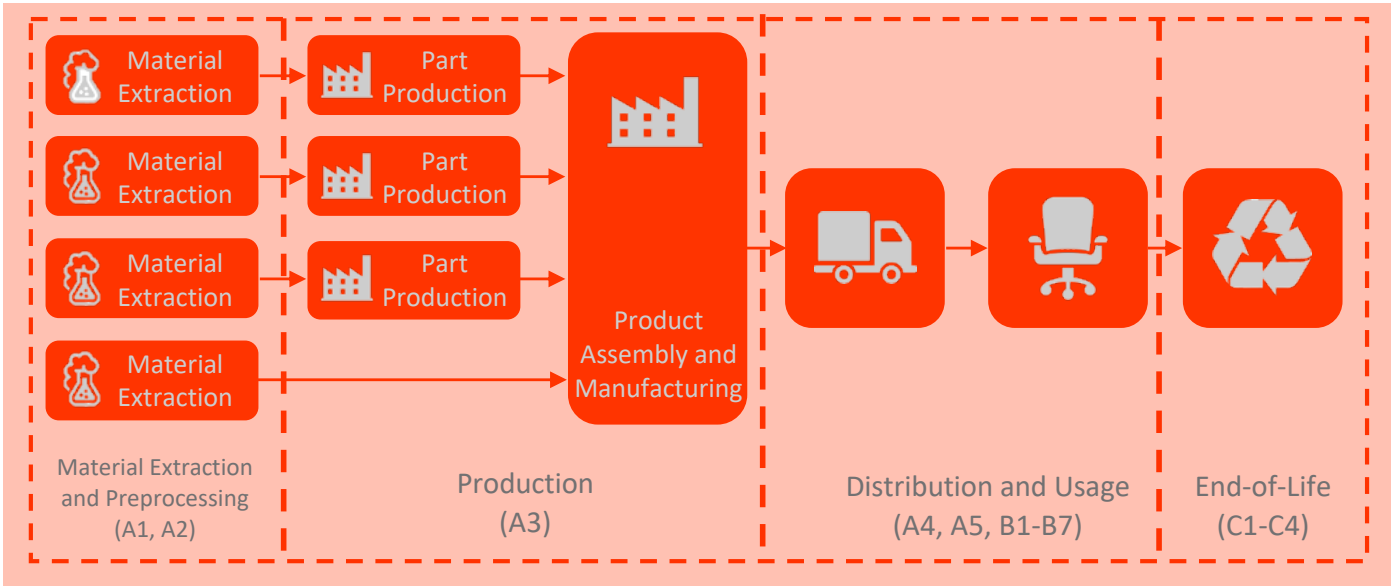

Overview of Life Cycle Stages

Tone Height-Adjustable Table


Life Cycle Impact Assessment – BIFMA PCR for Production in North America

Environmental Impacts were calculated using the GaBi software platform. Impact results according to the BIFMA PCR have been calculated using IPCC AR6 GWP₁₀₀ and TRACI 2.1 characterization factors. Additionally, LCI indicators have been calculated for primary energy, water usage, renewable and non-renewable resources used as energy carriers and materials, and recovered energy. Results presented in this report are for 1 m² of floor space maintained for 10 years. To fulfill this functional unit, 0.92 units of product are required.

The results presented here are for Tone Height-Adjustable Table (product codes TTDR5829N (top) and TBCEAM28 (stand)). Additionally, the results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins, or risks.

LCA Impact Category	Unit	Total	Raw Material Production	Product Production	Distribution and Retail	End of Life
Acidification Potential	kg SO ₂ eq	5.67E-01	3.65E-01	1.23E-01	4.56E-02	3.32E-02
Eutrophication Potential	kg N eq	6.65E-02	2.91E-02	2.41E-02	4.07E-03	9.31E-03
Global Warming Potential Including Biogenic Carbon	kg CO ₂ eq	1.94E+02	5.42E+01	4.85E+01	9.89E+00	8.17E+01
Global Warming Potential Excluding Biogenic Carbon	kg CO ₂ eq	1.94E+02	1.13E+02	4.64E+01	9.89E+00	2.47E+01
Photochemical Ozone Creation Potential (Smog)	kg O ₃ eq	8.95E+00	6.09E+00	1.45E+00	1.05E+00	3.61E-01
Ozone Depletion Potential	kg CFC-11 eq	8.14E-07	8.13E-07	1.37E-09	2.51E-14	7.64E-14
LCI Impact Category	Unit	Total	Raw Material Production	Product Production	Distribution and Retail	End of Life
Primary Energy Demand (Renewable and Non-Renewable)	MJ (net cal value)	2.52E+03	1.44E+03	9.11E+02	1.36E+02	3.27E+01
Fresh Water Consumption	kg	8.42E+02	3.28E+02	4.70E+02	1.91E+01	2.48E+01
Renewable Primary Resources Used as Energy Carrier	MJ (net cal value)	6.46E+02	5.16E+02	1.30E+02	0.00E+00	0.00E+00
Renewable Primary Resources Used as Materials	MJ (net cal value)	3.49E+02	2.09E+02	1.32E+02	5.66E+00	2.92E+00
Non-renewable Primary Resources Used as Energy Carrier	MJ (net cal value)	9.10E+01	2.46E+01	6.63E+01	0.00E+00	0.00E+00
Non-renewable Primary Resources Used as Materials	MJ (net cal value)	2.17E+03	1.23E+03	7.80E+02	1.31E+02	2.98E+01
Recovered Energy	MJ (net cal value)	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Life Cycle Impacts of Tone Height-Adjustable Table

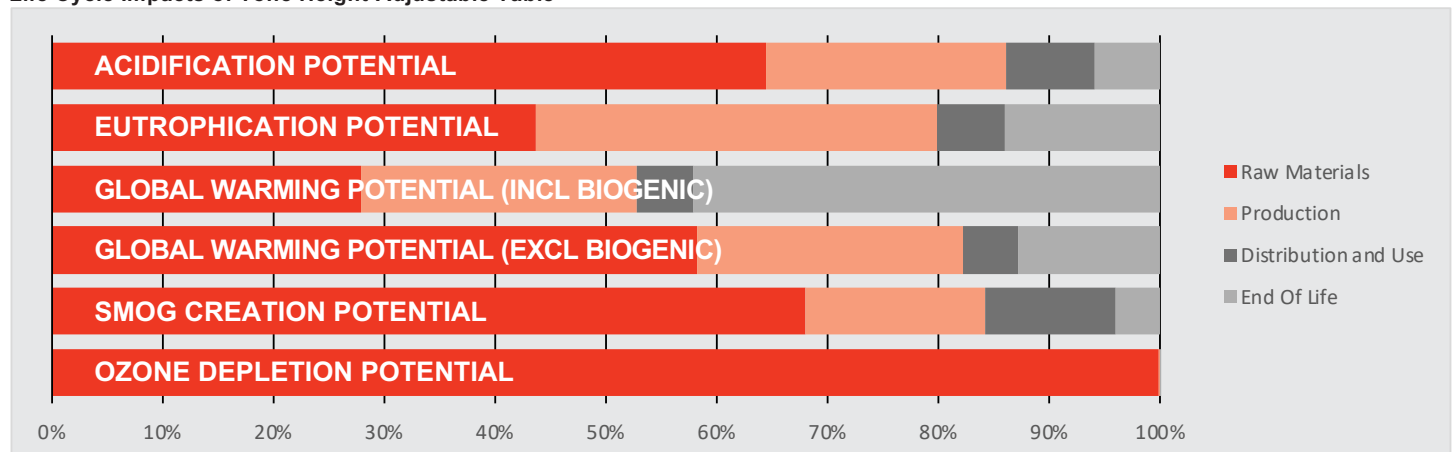

Tone Height-Adjustable Table

APPENDIX: EN 15804+A2

Additionally, results have been calculated using LCIA methodologies for core environmental impact categories specified in EN 15804+A2, as well as LCI indicators required by EN15804+A2 reference package EF 3.1. The results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins, or risks. Values in the scenario tables below are reported per functional unit, which is 1 m² of physical floor space covered for 10 years. To fulfill this functional unit, 0.92 units of product are required.

LCA Scenario Details

Functional Unit

Parameter	Value
Declared Unit	1 m ²
Number of Occupants	1
Reference Service Life Required	10 years
Biogenic Carbon in Product	11.7 kg C
Biogenic Carbon in Packaging	3.70 kg C

Reference Service Life

Parameter	Value per functional unit
Reference Service Life	10 Years
Design Application Parameters	Use as indicated in product brochure and warranty
Declared Product Properties	Properties given in product description on page 4
Indoor environment	Typical office and home environment
Use conditions	Typical office and home use

A4: Transport to the Building Site

Parameter	Value per functional unit
Transportation Type	Diesel Truck
Fuel Consumption	0.621 L/km
Distance	2,253 km
Capacity Utilization	61%
Capacity utilization volume factor	1
Weight of product (kg)	46.4
Volume (m ³)	1.07

A5: Installation in the Building

Parameter	Value per functional unit
Packaging Waste Produced	8.12 kg
Installation Assumptions	No product waste, Installed with hand tools.

B1: Use

Parameter	Value per functional unit
Per the PCR, no energy use is modeled for use phase. However, electricity consumption for one typical use cycle is estimated at 0.0016 kWh per hour.	

B2: Maintenance

Parameter	Value per functional unit
Maintenance Process	No maintenance is expected for this product
Maintenance cycle	0
Ancillary Materials for maintenance (kg/cycle)	0
Waste materials resulting from maintenance (kg)	0
Net fresh water consumption during maintenance (m3)	0
Energy input during maintenance (kWh)	0

B3: Repair

Parameter	Value per functional unit
Repair process	No repairs are expected for this product
Inspection process	No repairs are expected for this product
Repair cycle (#/RSL)	0
Ancillary materials (kg)	0
Waste materials from repair (kg)	0
Net freshwater consumption during repair (m3)	0
Energy input during repair (kWh)	0

B4: Replacements

Parameter	Value per functional unit
Replacement cycle (#/RSL)	0
Energy input during replacement (kWh)	0
Exchange of worn parts during the products life cycle (kg)	0

B5: Refurbishment

Parameter	Value per functional unit
Refurbishment process	No refurbishment is expected for this product
Refurbishment cycle (#/RSL)	0
Energy input during refurbishment (kWh)	0
Material input for refurbishment (kg)	0
Waste material resulting from refurbishment (kg)	0

B6 and B7: Use of energy and Use of Water

Parameter	Value per functional unit
Ancillary materials (kg)	0
Net freshwater consumption (m ³)	0
Power output of equipment (kW)	200 (upward motion) 60 (downward motion)
Characteristic performance	n/a

C1-C4: End-of-Life

Parameter	Value per functional unit
Weight of Product Collected (kg)	46.4
Weight to Recycling (kg)	3.38
Weight to Energy Recovery (kg)	8.61
Weight to Landfill (kg)	34.4
Distance to Recycling (km)	50
Distance to Energy Recovery (km)	100
Distance to Landfill (km)	50

D: Benefits and Loads Beyond the System Boundary

Parameter	Value per functional unit
Includes all flows leaving the system not allocated as co-products and have passed the end-of-waste state. Includes loads from processing recycled materials. Credits are calculated based on the amount of useable material and energy sent to the next product system. Credits not applied to the portion of flows derived from secondary sources.	

Tone Height-Adjustable Table

Life Cycle Stages

The results are provided according to the following life cycle modules:

Module	Description
A1	Product Stage: Raw Material Supply
A2	Product Stage: Transport
A3	Product Stage: Manufacturing
A4	Construction Process Stage: Transport
A5	Construction Process Stage: Installation
B1	Use Stage: Use
B2	Use Stage: Maintenance
B3	Use Stage: Repair
B4	Use Stage: Replacement
B5	Use Stage: Refurbishment
B6	Operational Energy Use
B7	Operational Water Use
C1	EOL: Deconstruction
C2	EOL: Transport
C3	EOL: Waste Processing
C4	EOL: Disposal
D	Benefits beyond system

Tone Height-Adjustable Table

Life Cycle Impact Assessment – EN 15804+A2 (EF 3.1) for Production in North America

EN 15804+A2 Results – 1 m² physical floorspace maintained for 10 Years

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP _{Total} [kg CO ₂ eq]	1.03E+02	9.89E+00	1.44E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.39E-01	9.21E+00	5.79E+01	-1.84E+01
GWP _{Fossil} [kg CO ₂ eq]	1.56E+02	9.88E+00	7.69E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.38E-01	5.42E-01	1.45E+00	-1.84E+01
GWP _{Biogenic} [kg CO ₂ eq]	-5.36E+01	4.10E-03	1.36E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.93E-05	8.66E+00	5.64E+01	0.00E+00
GWP _{LULUC} [kg CO ₂ eq]	6.16E-02	5.57E-03	1.64E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.35E-04	1.35E-04	3.10E-03	-8.03E-03
ODP [kg CFC 11 eq]	5.78E-07	1.26E-12	1.43E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.04E-14	5.62E-13	3.10E-12	-4.65E-08
AP [Mole H ⁺ eq]	5.28E-01	4.90E-02	4.37E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.23E-04	4.80E-03	8.87E-03	-6.64E-02
EP, freshwater [kg PO ₄ eq]	2.03E-03	5.05E-05	1.92E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.22E-06	-7.18E-07	5.65E-05	-6.65E-04
EP, marine [kg N eq]	1.44E-01	2.44E-02	1.28E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.50E-04	2.15E-03	1.10E-02	-1.49E-02
EP, terrestrial [Mole N eq]	1.55E+00	2.69E-01	1.66E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.86E-03	2.54E-02	3.24E-02	-1.47E-01
POCP [kg NMVOC eq]	3.85E-01	5.00E-02	3.25E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.00E-04	5.53E-03	1.89E-02	-4.32E-02
Resource Use, mineral and metals* [kg Sb eq]	2.27E-03	1.33E-06	9.79E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.22E-08	-8.03E-08	6.70E-08	-3.38E-03
Resource Use, fossil* [MJ]	2.10E+03	1.31E+02	1.45E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.16E+00	3.63E+00	2.16E+01	-2.20E+02
Water use* [m ³ world eq]	2.95E+01	5.86E-01	6.10E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.42E-02	7.90E-01	1.73E-01	-3.14E+00

GWP=Global Warming Potential; LULUC=Land Use and Land Use Change; ODP=Ozone Depletion Potential; EP=Eutrophication Potential; AP=Acidification Potential; POCP=Photochemical ozone creation potential

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Tone Height-Adjustable Table

Resource Use and Waste – 1 m² physical floorspace maintained for 10 years

Impact Category	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE [MJ]	9.86E+02	5.66E+00	1.30E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.37E-01	2.08E-01	2.44E+00	-1.52E+02
PERM [MJ]	3.41E+02	5.66E+00	1.30E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.37E-01	2.08E-01	2.44E+00	-1.49E+02
PERT [MJ]	1.33E+03	1.13E+01	2.60E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.74E-01	4.16E-01	4.89E+00	-3.01E+02
PENRE [MJ]	2.10E+03	1.31E+02	1.45E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.16E+00	3.63E+00	2.16E+01	-2.20E+02
PENRM [MJ]	9.10E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT [MJ]	2.20E+03	1.31E+02	1.45E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.16E+00	3.63E+00	2.16E+01	-2.20E+02
SM [kg]	1.13E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m ³]	7.99E-01	1.91E-02	1.48E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.62E-04	1.80E-02	4.84E-03	-7.71E-02
HWD [kg]	1.46E-05	1.77E-08	2.70E-10	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.28E-10	4.01E-10	4.09E-09	-1.54E-07
NHWD [kg]	2.74E+01	1.29E-02	1.18E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.12E-04	6.95E-01	2.46E+01	-1.10E+00
RWD [kg]	1.14E-01	3.38E-04	1.52E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.19E-06	9.38E-05	2.71E-04	-8.79E-03
HLRW [kg]	1.37E-04	4.01E-07	1.58E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.70E-09	1.11E-07	2.37E-07	-1.03E-05
ILLRW [kg]	1.13E-01	3.38E-04	1.52E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.18E-06	9.37E-05	2.71E-04	-8.78E-03
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR [kg]	4.73E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.45E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER [kg]	1.49E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.07E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE [MJ]	7.93E+00	0.00E+00	2.15E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.14E+01	1.01E+01	0.00E+00
PM [Disease Incidence]	5.97E-06	4.98E-07	4.72E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.02E-09	3.05E-08	8.91E-08	-7.94E-07
IRP**([kBq U235 eq])	1.01E+01	2.87E-02	1.72E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.95E-04	8.06E-03	3.95E-02	-7.86E-01
ETP-fw* [CTUe]	7.61E+02	1.02E+02	1.97E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E+00	1.78E+00	3.66E+01	-8.57E+01
HTP-c* [CTUh]	2.29E-07	2.53E-09	3.52E-11	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.81E-11	1.11E-10	3.81E-10	-2.81E-08
HTP-nc* [CTUh]	8.03E-07	4.03E-08	1.33E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.63E-10	8.87E-09	4.90E-08	-1.11E-07
SQP* [no unit]	6.60E+02	2.55E+01	2.33E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.16E-01	5.17E-01	2.54E+00	-2.36E+02

PERE=Renewable Primary Energy from Non-Materials; PERM=Renewable Primary Energy from Materials; PERT=Total Renewable Primary Energy; PENRE=Non-Renewable Primary Energy from Non-Materials; PENRM=Non-Renewable Primary Energy from Materials; PENRT=Total Non-Renewable Primary Energy; SM=Use of Secondary Materials; RSF=Use of Renewable Secondary Fuels; NRSF=Use of Non-Renewable Secondary Fuels; FW=Net Use of Fresh Water; HWD=Hazardous Waste Disposed; NHWD=Non-Hazardous Waste Disposed; RWD=Radioactive Waste Disposed; HLRW=High Level Radioactive Waste; ILLRW=Intermediate- and Low-Level Radioactive Waste; CRU=Components for Reuse; MFR=Materials for Recycling; MER=Materials for Energy Recovery; EE=Exported Energy; PM=Particulate Matter; IRP=Ionizing Human Radiation; ETP-fw=Eco-toxicity freshwater; HTP-c=Human toxicity - Cancer; HTP-nc=Human toxicity - Noncancer; SQP=Land use related impacts / soil quality

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

**This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Tone Height-Adjustable Table

References

1. CEN. (2019). CSN EN 15804+A2. Retrieved from European Standards: <https://www.en-standard.eu/csn-en-15804-a2-sustainability-of-construction-works-environmental-product-declarations-core-rules-for-the-product-category-of-construction-products/>
2. ISO 14040: 2006/ Amd 1:2020: Environmental Management – Life cycle assessment – Requirements and Guidelines.
3. ISO 14044: 2006/ Amd 1:2017/ Amd 2:2020: Environmental Management – Life cycle assessment – Requirements and Guidelines – Amendment 1.
4. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
5. IPCC (2021). Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change. [Masson-Delmotte, V., P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T.K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, and B. Zhou (eds.)]. Cambridge University Press. In Press.
6. Joint Research Centre of the EU Commission. (2022, July). Environmental Footprint reference packages . Retrieved from European Platform on LCA: <https://eplca.jrc.ec.europa.eu/LCDN/developerEF.html>
7. NSF International (2021). BIFMA PCR for Tables: UNCPC 3812 version 1, valid through January 31, 2026
8. NSF International National Center for Sustainability Standards (2015). General Program Instructions.
9. US EPA (2012). TRACI: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts. Version 2.1 – User Guide. Retrieved from <https://nepis.epa.gov/Adobe/PDF/P100HN53.pdf>.
10. US EPA (2022). Facts and Figures about Materials, Waste and Recycling. Retrieved from <https://www.epa.gov/facts-and-figures-about-materials-waste-and-recycling/national-overview-facts-and-figures-materials>
11. US EPA. (2022, December 3). Municipal Solid Waste Generation, Recycling, and Disposal in the United States: Facts and Figures for 2018. Retrieved from <https://www.epa.gov/facts-and-figures-about-materials-waste-and-recycling/national-overview-facts-and-figures-materials>
12. WAP Sustainability Consulting (2024, December). Life Cycle Assessment, MillerKnoll Background Report for LCA/EPD Creation Tool v1.0.