

Migration[®] Pro

AMERICAS



Certified
Environmental
Product Declaration
www.nsf.org



About this product

Migration[®] Pro are height-adjustable desks made for all the ways you work. Originally launched as a cost-effective solution focused on ergonomic design, Migration has evolved into a comprehensive collection of height-adjustable desks that offer a range of options for budget, aesthetics and performance.

The reference products is HA2ER desk covering 1.09 m² meaning 0.92 units are required to meet the functional unit of 1 m² of physical floor space for a 10-year period.

Date of Issue: June 30, 2026

Date of Expiration: June 30, 2031

Learn more

- Explore Steelcase environmental philosophy and commitments [overview](#).
- Find product details and sustainability certifications on [product page](#) at steelcase.com.
- See our product [warranty](#).
- Contact epd@steelcase.com for any EPD-related questions or inquiries.

About this document


This declaration describes the Life Cycle Assessment of the Migration Pro desk produced for the Americas by Steelcase Inc. in the United States and Mexico. The assessment is performed according to the ISO standards 14040 (2006), 14044 (2006) and 14025 (2006), and BIFMA PCR for Tables: UNCPC 3812 to generate an EPD for business-to-business communication.

ASSESSMENT OVERVIEW

EPD commissioner	Steelcase® Inc
Corporate Address	901 44th Street SE Grand Rapids, Michigan 49508-7594 United States
Product group	Tables
Product name	Migration Pro
Product intended use	Table
Product reference service life	10 years
Reference standards	ISO 14025, ISO 14040, ISO 14044
EPD scope	Cradle-to-grave
EPD number	EPD11311
Date of issuance	June 30, 2026
Date of expiration	June 30, 2031
EPD type	Product specific
EPD Product Coverage	Migration Pro desks for the Americas market, including the following codes: HAIER2
Intended audience	Business to business (B2B)
Year of reported manufacturer data	2025
Functional unit	One square meter of physical floor space for a reference service life of 10 years
Applicable markets/regions	Americas
LCA software and database version	GaBi 10.6.2.9; GaBi database, 2022.2
LCIA methodology and version number	TRACI 2.1, IPCC AR6
Program administrator	NSF Certification LLC 789 N. Dixboro, Ann Arbor, MI 48105 www.nsf.org
Reference PCR and version number	BIFMA PCR for Tables: UNCPC 3812 (BIFMA PCR, Ext March 2026)
PCR reviewer	Review Panel Chaired by Dr. Thomas Gloria
EPD reviewer	External review conducted by:



Jim Mellentine, Thrive ESG
 This declaration and its Life Cycle Assessment was independently verified in accordance with ISO standards 14040 (2006), 14044 (2006) and 14025 (2006), BIFMA PCR for Tables v1 Ext 2026.

LCA reviewer	External review conducted by:
	 Jim Mellentine, Thrive ESG The product Life Cycle Assessment was conducted in accordance with ISO 14044, and the reference PCR.

Disclaimer
 The PCR this EPD was based on was written to determine the potential environmental impacts of a table product from cradle-to-grave. It was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the results, due to and not limited to, the practitioner’s assumptions, the source of the data used in the study, and the specifics of the product modeled.

ASSESSMENT PARAMETERS

Functional unit

One square meter of physical floor space for a reference service life of 10 years. To fulfill the functional unit, 0.92 units are required.

Product scope

The product assessed is Migration Pro (style HAIER2 with and without cable tray) height-adjustable desks made for all the ways you work. The desk is of modular design with 58W"x29"D, t-leg, with height adjustable base (extended), arctic white, solid HPL, square edge, rectangular column, and electrical controller. The style with cable tray has dimensions 94W"x30"D. Migration Pro originally launched as a cost-effective solution focused on ergonomic design, Migration has evolved into a comprehensive collection of height-adjustable desks that offer a range of options for budget, aesthetics and performance.



One Migration Pro height-adjustable electrical desk is intended for use by 1 occupant.

<u>Manufacturing location</u>	<u>Product SKUs within the variation allowance</u>	<u>Applicable markets and regions</u>
Grand Rapids, MI (Kentwood), and Tijuana Mexico (AMEX)	Migration Pro HAIER2 with/without cable tray	Americas

Assessment goal and scope




The potential environmental impacts of Migration Pro its packaging throughout its entire life cycle – including raw materials extraction, production, transport, use, and end of life – were assessed. In the absence of primary information, the GaBi database was used for secondary data.

The life cycle stages included in this assessment follow the BIFMA PCR for Tables: UNCPC 3812. Material acquisition and pre-processing (including transportation), production, distribution, use and end-of-life are assessed for the table product.

For tables, no impacts associated with the use of the table are included in the assessment. Instead, energy usage requirements in kW-hr for 1 hour of usage are reported. An hour of usage includes adjusting the table from minimum height to maximum height, then returning the product to minimum height. The desk uses 0.003 kWh to complete one cycle. Energy use per day 0.014kWh * 260 days/year * 10 years =36.40 kWh/10-year service life.

Assessment boundary

The Life Cycle Assessment considers the full life cycle of the product from cradle to gate A1-A3 with options, A4-A5, B1, B4, C1-C4, and optionally Module D. Life cycle stages included in this assessment follow the BIFMA PCR for Office Furniture Workspace V2 March 2025: UNCPC 3814. Because the BIFMA PCR serves as the core PCR, life cycle stages and phases are first presented according to the PCR for Workspace.

	Stage	Status
 <p>Cradle to inbound gate MATERIALS ACQUISITION Raw material extraction, pre-processing and transportation of materials to suppliers.</p>	A1. Raw material supply	✓
	A2. Transport	✓
	A3. Manufacturing	✓
 <p>Gate to gate PRODUCTION PROCESS Transportation of furniture components and materials from Tier 1 suppliers to Steelcase final manufacturing facility. External and internal production</p>	A4. Transport	✓
	A5. Installation	✓
 <p>Gate to grave DISTRIBUTION, USE AND END OF LIFE Distribution of products, installation, use and end of life.</p>	B1. Use	✓
	B2. Maintenance/cleaning	✓
	B3. Repair	✓
	B4. Replacement	✓
	B5. Refurbishment	✓
	B6. Operational energy use	✓
	B7. Operational water use	✓
	C1. Disassembly	✓
	C2. Transport	✓
	C3. Waste processing	✓
	C4. Disposal	✓
Beyond the boundary	D. Reuse/recovery	✓


RESULTS

The product composition, packaging composition, recycled content, recyclability visuals, and life cycle impacts below relate specifically to one m² (0.92 units) of Migration Pro HAIER2 configuration without cable tray, consisting of a table with height-adjustable T legs, and rectangular top.


Product composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Melamine faced particleboard	22.271	48.62%	0	0	49	10.913
Steel	17.093	37.31%	17	2.906	20	3.419
Aluminum	4.503	9.83%	67	3.017	30	1.351
Electrical components	1.841	4.02%	0	0	0	0
ABS	0.018	0.04%	0	0	0	0
PA 6/66	0.060	0.13%	0	0	0	0
POM	0.019	0.04%	0	0	0	0
Rubber	0.004	0.01%	0	0	0	0
Total	45.809	100%	--	5.923	--	15.583

Product packaging composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	1.255	95.93%	40	0.502	0	0
Paper	0.004	0.29%	0	0	0	0
PP	0.049	3.75%	0	0	0	0
PVC	0.000	0.03%	0	0	0	0
Total	1.308	100%	--	0.502	--	0

Product recycled content* and recyclability** summary



TOTAL RECYCLED CONTENT*



RECYCLABILITY BY WEIGHT**

*Total recycled content based on supplier's data. The source of recycled content of various materials could be either post-industrial or post-consumer based on market availability.

**Recyclability rate is the maximum amount of the product that is recyclable, based on the availability of recycling facilities in the regions and the ability of the product to be disassembled. Per the requirements of the PCR, the end-of-life results presented in this EPD were calculated using the US EPA's Warm Model within the 2020 Municipal Solid Waste Report for parts that can be disassembled. Excludes packaging.


Life cycle impact by category and stage

Environmental impacts were calculated using the GaBi software platform. Impact results according to the BIFMA PCR have been calculated using TRACI 2.1 and IPCC AR6 characterization factors. Results presented in this report are for one square meter of physical floor space for 10 years. Additionally, the results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins, or risks.

	Unit	Life cycle stages				Totals
		A1-A2 Materials acquisition	A3 Production process	A4-B7 Distribution & Use	C1-C4 End of life	
*Global warming potential (100 years) Warming of the atmosphere caused by the global release of greenhouse gases.	kg CO2 eq	1.48E+02	3.44E+01	1.01E+01	2.05E+01	2.13E+02
*Acidification Emissions that increase the acidity of the environment due to various chemical reactions and/or biological activity, or by natural circumstances.	kg SO2 eq	6.39E-01	5.29E-02	5.38E-02	6.78E-02	8.13E-01
*Photochemical ozone creation (Smog) Through various chemical reactions, which occur between nitrogen oxides (NOx) and volatile organic compounds (VOCs) in sunlight.	kg O3 eq	9.01E+00	8.54E-01	1.22E+00	5.42E-01	1.16E+01
*Eutrophication Enrichment of an aquatic ecosystem with nutrients (nitrates, phosphates) that accelerate biological productivity and an undesirable accumulation of algal biomass.	kg N eq	3.02E-01	2.46E-02	4.96E-02	2.50E-02	4.01E-01
*Ozone depletion Reduction of the stratospheric ozone layer due to anthropogenic emissions of ozone depleting substances.	kg CFC-11 eq	6.97E-08	4.79E-10	3.43E-12	4.46E-12	7.02E-08
Primary energy demand Energy consumption at the source.	MJ	2.68E+03	7.33E+02	1.28E+02	3.51E+01	3.58E+03
Net freshwater usage Freshwater used and otherwise not recoverable.	kg	3.11E+03	1.48E+02	4.33E+00	2.91E+01	3.29E+03
Renewable primary resources used as an energy carrier RPRE First use materials from renewable sources with energy content used as a fuel	MJ	8.82E+02	9.22E+01	4.97E+00	1.89E+00	9.81E+02
Renewable primary resources used as material RPRM First use materials from renewable sources with energy content used as a material	MJ	0.00E+00	3.17E+01	0.00E+00	0.00E+00	3.17E+01
Non-renewable primary resources used as an energy carrier First use materials from non-renewable sources with energy content used as a fuel	MJ	1.71E+03	6.06E+02	1.23E+02	3.33E+01	2.47E+03
Non-renewable primary resources used as material First use materials from non-renewable sources with energy content used as a material	MJ	8.76E+01	2.82E+00	0.00E+00	0.00E+00	9.04E+01
Recovered electrical energy (EEE) Electrical energy recovered from disposal of waste in previous systems	MJ	0.00E+00	2.47E+01	3.74E-01	1.92E+01	4.42E+01
Recovered thermal energy (EET) Thermal energy recovered from disposal of waste in previous systems	MJ	0.00E+00	7.74E+00	1.66E-01	6.56E+00	1.45E+01

Methods: TRACI 2.1, IPCC AR6

Global warming potential summary

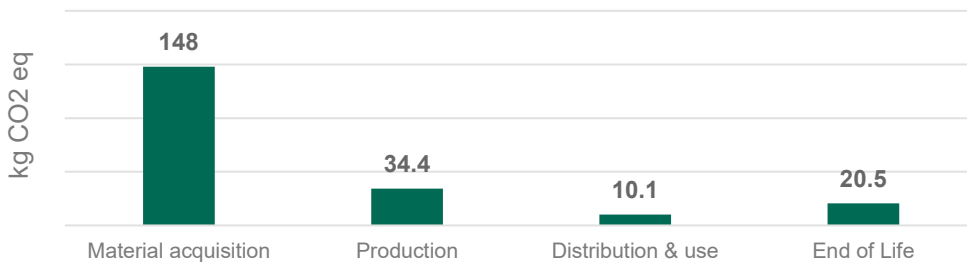

213 kg total CO₂-eq footprint

TECHNICAL INFORMATION AND SCENARIOS FOR MODULES BEYOND THE FACTORY GATE

A4: Transport to the installation site

Parameter	Value per product	Value per product
Transportation type	Truck trailer	Ship
Fuel consumption (l/km)	0.42 diesel	130 heavy fuel oil
Distance*	1250 km	14 km

*Weighted average distance per product market share

A5: Installation in the building

Parameter	Value per functional unit
Installation Assumptions	No product waste Installed with hand tools
Energy use for installation	0 kWh
Transportation type for installation waste	Truck
Fuel consumption (l/km)	0.42 diesel
Distance	32.2 km
Packaging to recycling	0.86 kg
Packaging to energy recovery	0.09 kg
Packaging to landfill	0.35 kg

B1, B2, B3, B4, B5, B6, B7: Use

B6. Operational energy use per day	0.014 kWh
------------------------------------	-----------

C1- C4: End-of-life

Parameter	Value per functional unit
Method of deconstruction	Hand tools
Method of recycling	Mechanical recycling
Method of energy recovery	Incineration
Final disposal of remaining parts	Landfilling
Transportation type	Truck
Fuel consumption (l/km)	0.42 diesel
Distance to waste processing site	32.2 km
Weight to recycling	6.44 kg
Weight to energy recovery	7.87 kg
Weight to landfill	31.49 kg

ADDITIONAL ENVIRONMENTAL INFORMATION

The following product composition, packaging composition, pre- and post-consumer recycled content and the global warming potential results represent the Migration Pro (without cable tray) configuration without scaling to the functional unit.


Product composition			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Melamine faced particleboard	24.208	48.62%	0	0	49	11.862
Steel	18.580	37.31%	17	3.169	20	3.716
Aluminum	4.894	9.83%	67	3.279	30	1.468
Electrical components	2.001	4.02%	0	0	0	0
ABS	0.020	0.04%	0	0	0	0
PA 6/66	0.065	0.13%	0	0	0	0
POM	0.021	0.04%	0	0	0	0
Rubber	0.004	0.01%	0	0	0	0
Total	49.793	100%	--	6.448	--	17.046

Product packaging composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	1.364	95.93%	40	0.546	0	0
PE Foam	0.004	0.29%	0	0	0	0
PE Film	0.053	3.75%	0	0	0	0
Paper	0.001	0.03%	0	0	0	0
Total	1.422	100%	--	0.546	--	0

Life cycle stages

	Unit	A1-A2 Materials acquisition	A3 Production process	A4-B7 Distribution & Use	C1-C4 End of life	Totals
*Global warming potential (100 years) Warming of the atmosphere caused by the global release of greenhouse gases excludes biogenic carbon.	kg CO2 eq	1.37E+02	3.06E+01	9.01E+00	1.88E+01	1.95E+02

Methods: TRACI 2.1, IPCC AR6

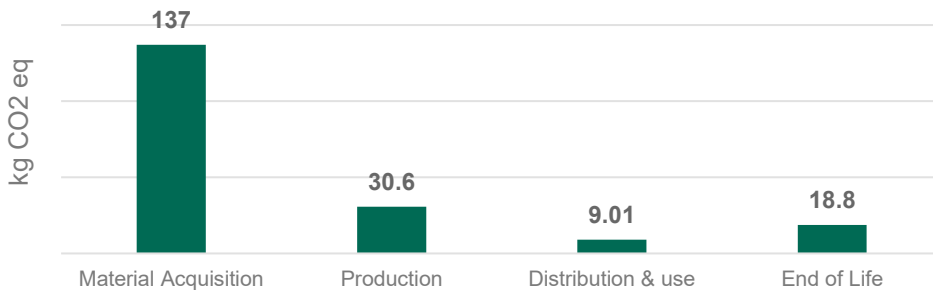

**195 kg
total CO₂-eq
footprint**


RESULTS

The product composition, packaging composition, recycled content, recyclability visuals, and life cycle impacts below relate specifically to one m² (0.55 units) of Migration Pro HAIER2 with cable tray configuration (worst case), consisting of a table with height-adjustable T legs, rectangular top, and cable support.


Product composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Melamine faced particleboard	30.890	52.15%	0	0	49	15.136
Steel	21.901	36.97%	17	3.723	20	4.380
Aluminum	4.503	7.60%	67	3.017	30	1.351
Electrical components	1.841	3.11%	0	0	0	0
ABS	0.018	0.03%	0	0	0	0
PA 6/66	0.060	0.10%	0	0	0	0
POM	0.019	0.03%	0	0	0	0
Rubber	0.004	0.01%	0	0	0	0
Total	59.235	100%	--	6.740	--	20.867

Product packaging composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	1.255	95.93%	40	0.502	0	0
Paper	0.004	0.29%	0	0	0	0
PP	0.049	3.75%	0	0	0	0
PVC	0.000	0.03%	0	0	0	0
Total	1.308	100%	--	0.502	--	0

Product recycled content* and recyclability** summary



TOTAL RECYCLED CONTENT*



RECYCLABILITY BY WEIGHT**

*Total recycled content based on supplier's data. The source of recycled content of various materials could be either post-industrial or post-consumer based on market availability.


**Recyclability rate is the maximum amount of the product that is recyclable, based on the availability of recycling facilities in the regions and the ability of the product to be disassembled. Per the requirements of the PCR, the end-of-life results presented in this EPD were calculated using the US EPA's Warm Model within the 2020 Municipal Solid Waste Report for parts that can be disassembled. Excludes packaging.

Life cycle impact by category and stage

Environmental impacts were calculated using the GaBi software platform. Impact results according to the BIFMA PCR have been calculated using TRACI 2.2 and IPCC AR6 characterization factors. Results presented in this report are for one square meter of physical floor space for 10 years. Additionally, the results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins, or risks.

	Unit	Life cycle stages				Totals
		A1-A2 Materials acquisition	A3 Production process	A4-B7 Distribution & Use	C1-C4 End of life	
*Global warming potential (100 years) Warming of the atmosphere caused by the global release of greenhouse gases.	kg CO2 eq	2.86E+02	5.60E+01	2.09E+01	4.61E+01	4.09E+02
*Acidification Emissions that increase the acidity of the environment due to various chemical reactions and/or biological activity, or by natural circumstances.	kg SO2 eq	1.24E+00	7.94E-02	1.13E-01	1.52E-01	1.58E+00
*Photochemical ozone creation (Smog) Through various chemical reactions, which occur between nitrogen oxides (NOx) and volatile organic compounds (VOCs) in sunlight.	kg O3 eq	1.79E+01	1.30E+00	2.58E+00	1.18E+00	2.30E+01
*Eutrophication Enrichment of an aquatic ecosystem with nutrients (nitrates, phosphates) that accelerate biological productivity and an undesirable accumulation of algal biomass.	kg N eq	1.87E-04	2.07E-04	1.78E-05	1.78E-04	5.90E-04
*Ozone depletion Reduction of the stratospheric ozone layer due to anthropogenic emissions of ozone depleting substances.	kg CFC-11 eq	1.50E-07	8.04E-10	7.19E-12	9.32E-12	1.51E-07
Primary energy demand Energy consumption at the source.	MJ	5.24E+03	1.17E+03	2.70E+02	7.23E+01	6.76E+03
Net freshwater usage Freshwater used and otherwise not recoverable.	kg	6.14E+03	2.38E+02	8.65E+00	6.17E+01	6.45E+03
Renewable primary resources used as an energy carrier RPRE First use materials from renewable sources with energy content used as a fuel	MJ	1.73E+03	1.39E+02	1.05E+01	4.22E+00	1.89E+03
Renewable primary resources used as material RPRM First use materials from renewable sources with energy content used as a material	MJ	0.00E+00	3.48E+01	0.00E+00	0.00E+00	3.48E+01
Non-renewable primary resources used as an energy carrier First use materials from non-renewable sources with energy content used as a fuel	MJ	3.34E+03	9.96E+02	2.60E+02	6.80E+01	4.66E+03
Non-renewable primary resources used as material First use materials from non-renewable sources with energy content used as a material	MJ	1.67E+02	4.47E+00	0.00E+00	0.00E+00	1.72E+02
Recovered electrical energy (EEE) Electrical energy recovered from disposal of waste in previous systems	MJ	0.00E+00	4.13E+01	4.33E-01	4.31E+01	8.49E+01
Recovered thermal energy (EET) Thermal energy recovered from disposal of waste in previous systems	MJ	0.00E+00	1.30E+01	2.21E-01	1.42E+01	2.74E+01

Methods: TRACI 2.1, IPCC AR6

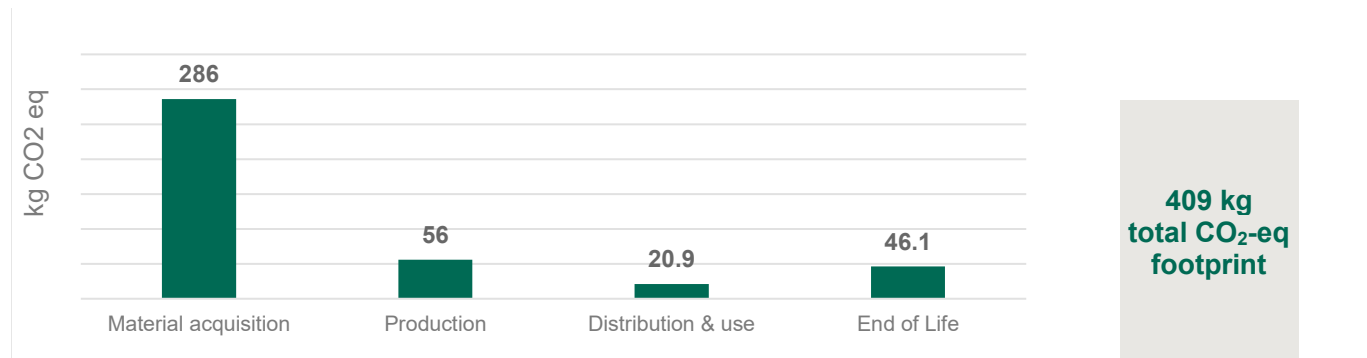

RESULTS

The following product composition, packaging composition, recycled content, recyclability visuals, and life cycle impacts below relate specifically to one m² of Migration Pro HAIER2 with cable tray configuration (worst case), consisting of a table with heigh-adjustable T legs, rectangular top, and cable support without scaling to the functional unit.

Product composition			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Melamine faced particleboard	33.576	52.15%	0	0	49	16.452
Steel	23.805	36.97%	17	4.047	20	4.761
Aluminum	4.894	7.60%	67	3.279	30	1.468
Electrical components	2.001	3.11%	0	0	0	0
ABS	0.020	0.03%	0	0	0	0
PA 6/66	0.065	0.10%	0	0	0	0
POM	0.021	0.03%	0	0	0	0
Rubber	0.004	0.01%	0	0	0	0
Total	64.386	100%	--	7.326	--	22.681


Product packaging composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	1.364	95.93%	40	0.546	0	0
Paper	0.004	0.29%	0	0	0	0
PP	0.053	3.75%	0	0	0	0
PVC	0.001	0.03%	0	0	0	0
Total	1.308	100%	--	0.546	--	0

Life cycle stages

Unit	A1-A2 Materials acquisition		A3 Production process	A4-B7 Distribution & Use	C1-C4 End of life	Totals
	kg CO2 eq	1.57E+02	3.08E+01	1.15E+01	2.53E+01	

*Global warming potential
(100 years) Warming of the atmosphere caused by the global release of greenhouse gases excludes biogenic carbon.

Methods: TRACI 2.1, IPCC AR6

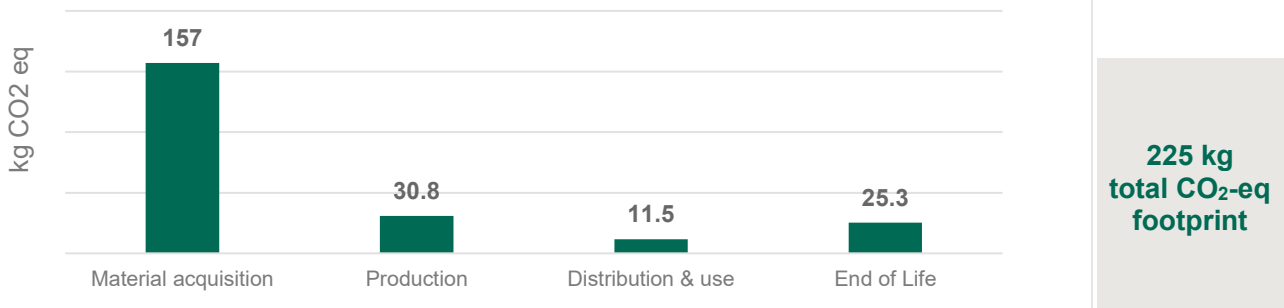

Indoor air: Steelcase Systems products are certified with SCS's Indoor Advantage Gold™ program, conforming to the ANSI/BIFMA Furniture Emissions Standard (M7.1/X7.1-2011 R2021) and CDPH/EHLB Standard Method (CA 01350) v1.2-2017. The certification can be found [here](#).

Improper disposal of product: At the end of its useful life, manage Steelcase products correctly in accordance with all applicable regulations for effective end-of-life management, including recycling, disposal, or incineration. Improper management may result in the release of chemicals that may represent a risk to the environment and human health & safety.

REFERENCES

Life Cycle Assessment, LCA Report for Steelcase. WAP Sustainability Consulting November 2022. *Updated by Steelcase March 2024.*

NSF BIFMA Product Category Rule (PCR) for Tables: UNCPC 3812 Ext March 2026.

ANSI/BIFMA X5.5-2021, Desk and Table Products.

ANSI/BIFMA e3, Furniture Sustainability Standard.

ACLCA Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017. May 2019

ISO 14025:2006 Environmental Labels and Declarations – Type III Environmental Declarations – Principles and Procedures.

ISO 14040:2006 Environmental Management – Life Cycle Assessment – Principles and Framework, Requirements and Guidelines.

ISO 14044:2006 Environmental Management – Life cycle assessment – Requirements and Guidelines.

ISO 14044: 2006/ Amd 1:2017 Environmental Management – Life cycle assessment – Requirements and Guidelines – Amendment 1.

NSF Certification Policies for Environmental Product Declarations (EPD). November 1, 2022.



Visit steelcase.com

 facebook.com/Steelcase

 twitter.com/Steelcase

 youtube.com/SteelcaseTV

Contact
For further questions, please contact:
epd@steelcase.com