

Elective Elements

AMER



Certified Environmental Product Declaration
www.nsf.org



About this product

Elective Elements supports a wide range of work modes in private office and open plans. A refined aesthetic speaks to the senses, while new parametric sizing options on select styles provide increased precision and design options.

The reference product is Elective Elements including worksurface and storage space. The floor space is 2.45 m² meaning 0.41 units are required to meet the functional unit of 1 m² of physical floor space for a 10-year period.

Date of Issue: March 9th, 2026
Date of Expiration: March 9th, 2031


Learn more

- Explore Steelcase environmental philosophy and commitments [overview](#).
- Find product details and sustainability certifications on the [product page](#) at steelcase.com.
- See our [product warranty](#).
- Contact epd@steelcase.com for any EPD-related questions or inquiries.

About this document

This declaration describes the Life Cycle Assessment of Elective Elements produced for the Americas market by Steelcase Inc. Grand Rapids, Michigan. The assessment is performed according to the ISO standards 14040 (2006), 14044 (2006) and 14025 (2006), and BIFMA PCR for Office Furniture Workspace v2 March 2025: UNCPC 3814 to generate an EPD for business-to-business communication.

ASSESSMENT OVERVIEW

EPD commissioner	Steelcase® Inc
Corporate Address	901 44th Street SE Grand Rapids, Michigan 49508-7594 United States
Product group	Workspace
Product name	Elective Elements
Product intended use	Office furniture
Product reference service life	10 years
Reference standards	ISO 14025, ISO 14040, ISO 14044, ISO 21930
EPD scope	Cradle-to-gate with options A1-A3, A4-A5, B1, B4, C1-C4, and optionally D
EPD number	EPD11216
Date of issuance	March 9th, 2026
Date of expiration	March 9th, 2031
EPD type	Product specific
EPD Product Coverage	Elective Elements for the Americas market
Intended audience	Business to business (B2B)
Year of reported manufacturer data	2025
Functional unit	One square meter of physical floor space for a reference service life of 10 years
Applicable markets/regions	AMER
LCA software and database version	GaBi 10.6.2.9; GaBi database, 2022.2
LCIA methodology and version number	TRACI 2.2, CML2001, IPPC AR6, ISO 21930
Program administrator	NSF Certification LLC 789 N. Dixboro, Ann Arbor, MI 48105 www.nsf.org
Reference PCR and version number	BIFMA PCR for Office Furniture Workspace Products UNCPC 3814, Version 2
PCR reviewer	Review Panel Chaired by Alex Misna
EPD reviewer	<p>External review conducted by:</p>  <p>Jim Mellentine, Thrive ESG This declaration and its Life Cycle Assessment was independently verified in accordance with ISO standards 14040 (2006), 14044 (2006) and 14025 (2006), BIFMA PCR for Office Furniture Workspace v2 March 2025, and ISO 21930.</p>
LCA reviewer	<p>External review conducted by:</p>  <p>Jim Mellentine, Thrive ESG The product Life Cycle Assessment was conducted in accordance with ISO 14044, ISO 21930, and the reference PCR.</p>
Disclaimer	<p>The PCR this EPD was based on was written to determine the potential environmental impacts of a workspace product from cradle-to-gate with options A1-A3, A4-A5, B1, B4, C1-C4, and optionally D. It was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.</p>

ASSESSMENT PARAMETERS

Functional unit

One square meter of physical floor space for a reference service life of 10 years under ANSI/BIFMA X5.6-2016 (R2021), Panel Systems.

The floor space of the referenced model is 2.45 m² meaning 0.41 units are required to meet the functional unit of 1 m² of physical floor space. All Elective Elements components have a 10-year Limited Lifetime Warranty.

Product scope

The product assessed is a typical application that represents Elective Elements' statement of line: upper and lower storage, tower, desk (pedestal and worksurface) with modesty panel, and tackboards. Styles included:

- E6NB1527P (Panel-Back, Pedestal application, 15W x 27 1/2H)
- E6OS159615H (Overhead cabinet - Single high, Hinged doors, 15 7/8D x 96W x 15H)
- E6PD231827B (Pedestal, Plinth base, Box / box / file, 23 1/4D x 18W x 27 1/2H)
- E6PD291527B (Pedestal, Plinth base, Box / box / file, 29 1/4D x 15W x 27 1/2H)
- E6QL27 (Platinum metallic legs)
- E6TW242477C Tower, Plinth base, Full height door hinged left hand, Wardrobe left hand, 24D x 24W x 77 1/2H)
- E6TW242477D (Tower, Plinth base, Full height door hinged right hand, Wardrobe right hand, 24D x 24W x 77 1/2H)
- E6VPC (Power unit, Corded, 2 electrical outlets, Wire pass through)
- EEAWST (tackboards 96W x 33.5H)
- EEWSL (HPL worksurface 36D x 72W)
- EEWSMHL (hanging modesty laminate panel 66W x 18H)
- AWAA (cable tray)
- AWAK (Attachment kit, cabinet to cabinet application)



Results presented on the subsequent pages are for Elective Elements manufactured in Grand Rapids, Michigan. Per the PCR, Elective Elements is classified as subcategory Option C: Desking (intended for single occupancy at one time).

Assessment goal and scope

The potential environmental impacts of Elective Elements and its packaging throughout its entire life cycle – including raw materials extraction, production, transport, use, and end of life – were assessed. In the absence of primary information, the GaBi database was used for secondary data.

The life cycle stages included in this assessment follow the BIFMA PCR for Office Furniture Workspace Products UNCPC 3814, Version 2. Material acquisition and pre-processing (including transportation), production, distribution, use and end-of-life are assessed for the systems product.

Assessment boundary

The Life Cycle Assessment considers the full life cycle of the product as described here from cradle to gate A1-A3 with options, A4-A5, B1, B4, C1-C4, and optionally Module D. Life cycle stages included in this assessment follow the BIFMA PCR for Office Furniture Workspace V2 March 2025: UNCPC 3814. Because the BIFMA PCR serves as the core PCR, life cycle stages and phases are first presented according to the PCR for Workspace.

	Stage	Status
 <p>Cradle to inbound gate MATERIALS ACQUISITION</p> <p>Raw material extraction, pre-processing and transportation of materials to suppliers.</p>	A1. Raw material supply	✓
	A2. Transport	✓
	<p>Gate to gate PRODUCTION PROCESS</p> <p>Transportation of furniture components and materials from Tier 1 suppliers to Steelcase final manufacturing facility. External and internal production</p>	
	A3. Manufacturing	✓
	A4. Transport	✓
	A5. Installation	✓
	B1. Use	✓
	B2. Maintenance/cleaning	MND
	B3. Repair	MND
	B4. Replacement	✓
	B5. Refurbishment	MND
	B6. Operational energy use	MND
	B7. Operational water use	MND
	C1. Disassembly	✓
	C2. Transport	✓
	C3. Waste processing	✓
C4. Disposal	✓	
 <p>Gate to grave DISTRIBUTION, USE AND END OF LIFE</p> <p>Distribution of products, installation, use and end of life.</p>	D. Reuse/recovery	MND
Beyond the boundary		

MATERIALS

The product composition, packaging composition, pre- and post-consumer recycled content, and recyclability visuals below relate specifically to 1 m² of the Elective Elements configuration listed above.


Product composition per functional unit

Material	Weight (kg)	Weight (%)	Post-consumer		Pre-consumer	
			%	Weight (kg)	%	Weight (kg)
Particle board	233.13	84.53%	0	0	50	116.57
Steel	16.240	5.89%	22.43	3.64	20.57	3.35
Plywood	8.754	3.17%	0	0	0	0
ABS	6.941	2.52%	0	0	0	0
Nylon (PA6 and PA66)	4.889	1.77%	0	0	0	0
MDF	3.476	1.26%	0	0	50	1.74
Other plastics	0.802	0.29%	0	0	0	0
Aluminum	0.685	0.25%	21.96	0.15	18.95	0.13
Solid wood	0.332	0.12%	0	0	0	0
Other metals	0.319	0.12%	0	0	0	0
Polyurethane (PU)	0.215	0.08%	0	0	0	0
Polyester fabric	0.020	0.01%	0	0	0	0
Total	275.803	100%	--	3.79	--	121.79


Product packaging per functional unit

Material	Weight (kg)	Weight (%)	Post-consumer		Pre-consumer	
			%	Weight (kg)	%	Weight (kg)
Cardboard	15.070	58.19%	40	6.03	0	0
Plastics	10.283	39.71%	0	0	0	0
Solid wood	0.371	1.43%	0	0	0	0
Paper	0.173	0.67%	0	0	0	0
Total	25.897	100%	--	6.03	--	0

Product recycled content* and recyclability** summary

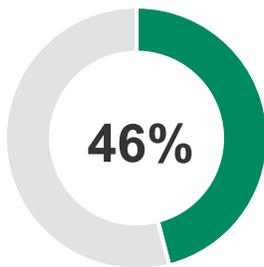

TOTAL RECYCLED CONTENT *

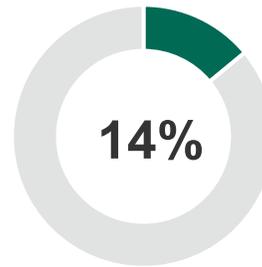

RECYCLABILITY BY WEIGHT**

*Total recycled content based on supplier's data. The source of recycled content of various materials could be either post-industrial or post-consumer based on market availability. Excludes packaging.

**Recyclability rate is the maximum amount of the product that is recyclable, based on the availability of recycling facilities in the regions and the ability of the product to be disassembled. Per the requirements of the PCR, the end-of-life results presented in this EPD were calculated using the US EPA's Warm Model within the 2020 Municipal Solid Waste Report for parts that can be disassembled. Excludes packaging.

RESULTS


Life cycle impact by category and stage

Environmental impacts were calculated using the GaBi software platform. Impact results according to the BIFMA PCR have been calculated using TRACI 2.2, IPCC AR6, CML200, and ISO 21930 for multiple LC indicators. Results presented in this report are for one square meter of physical floor space for one occupant for 10 years. Additionally, the results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins. Use stage modules B2, B3, B5-B7 not declared.

Methods: IPCC AR6, TRACI 2.2, ISO 21930, CML 2001

Environmental impact indicators	Unit	Production			Construction		Use		End of Life				Totals
		A1–A3	A4	A5	B1	B4	C1	C2	C3	C4			
(GWP) Global warming potential 100 years excludes biogenic carbon	kg CO2eq	2.85E+02	4.96E+01	7.10E+00	0	0	0	1.57E+00	6.50E+00	1.60E+02			5.10E+02
(GWP) Global warming potential 100 years includes biogenic carbon	kg CO2eq	8.85E+01	4.98E+01	9.39E+00	0	0	0	1.57E+00	7.36E+01	2.35E+02			4.58E+02
(AP) Acidification potential	kg SO2e	7.50E-01	2.78E-01	1.10E-02	0	0	0	9.46E-03	3.93E-02	4.83E-01			1.57E+00
(POCP) Photochemical ozone creation	kg O3 eq	2.33E+01	6.40E+00	9.22E-02	0	0	0	2.51E-01	1.15E+00	2.20E+00			3.34E+01
(EP) Eutrophication - marine	kg N eq	7.78E-01	2.60E-01	4.03E-03	0	0	0	8.13E-03	3.30E-02	1.48E-01			1.23E+00
(ODP) Ozone depletion	kg CFC-11eq	4.97E-07	1.40E-11	2.46E-12	0	0	0	4.28E-13	5.56E-12	1.32E-11			4.97E-07
Carbon emissions and removals													
(BCRP) Biogenic carbon removal from product	kg CO2eq	2.66E+01	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			2.66E+01
(BCEP) Biogenic carbon emission from product	kg CO2eq	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	2.66E+01			2.66E+01
(BCRK) Biogenic carbon removal from packaging	kg CO2eq	2.45E+01	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			2.45E+01
(BCEK) Biogenic carbon emission from packaging	kg CO2eq	0.00E+00	0.00E+00	2.45E+01	0	0	0	0.00E+00	0.00E+00	0.00E+00			2.45E+01
(BCEW) Biogenic carbon emission from combustion of renewable waste used in production	kg CO2eq	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(CCE) Calcination carbon emissions	kg CO2eq	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(CCR) Carbonation carbon removal	kg CO2eq	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(CWNR) Carbon emission from combustion of non-renewable waste used in production	kg CO2eq	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
Output flows and waste categories													
(HWD) Hazardous waste disposed	kg	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(NHWD) Non-hazardous waste disposed	kg	6.93E+00	6.50E-02	1.16E+01	0	0	0	1.90E-03	1.06E+00	1.33E+02			1.52E+02
(HLRW) High-level radioactive waste, conditioned, to final repository	kg	7.06E-05	2.60E-06	1.56E-07	0	0	0	8.01E-08	9.42E-07	8.20E-07			7.52E-05
(ILLRW) Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	6.25E-02	2.18E-03	1.58E-04	0	0	0	6.73E-05	7.91E-04	7.21E-04			6.64E-02
(CRU) Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(MFR) Materials for recycling	kg	1.86E+00	0.00E+00	1.16E+01	0	0	0	0.00E+00	5.19E+01	0.00E+00			6.53E+01
(MER) Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(EEE) Recovered electrical energy exported from the product system	MJ	5.26E-01	0.00E+00	9.92E+00	0	0	0	0.00E+00	1.68E+02	0.00E+00			1.78E+02
(EET) Recovered thermal energy exported from the product system	MJ	2.13E-01	0.00E+00	1.43E+01	0	0	0	0.00E+00	5.68E+01	0.00E+00			7.13E+01
Resource use indicators													
(RPRr) Renewable primary resources used as energy carrier	MJ	3.74E+03	2.64E+01	1.44E+00	0	0	0	7.13E-01	2.51E+00	9.31E+00			3.78E+03
(RPRm) Renewable primary resources with energy content used as material	MJ	2.20E+02	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			2.20E+02
(NRPRr) Non-renewable primary resources used as energy carrier	MJ	2.87E+03	6.37E+02	9.51E+00	0	0	0	1.98E+01	3.12E+01	6.55E+01			3.64E+03
(NRPRm) Non-renewable primary resources with energy content used as material	MJ	1.16E+03	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			1.16E+03
(SM) Secondary materials	kg	1.42E+02	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			1.42E+02
(RSF) Renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(NRSF) Non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(RE) Recovered energy	MJ	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00			0.00E+00
(FW) Net freshwater use including water from electricity generation	M3	2.74E+00	2.85E-02	1.38E-02	0	0	0	7.78E-04	1.38E-01	3.15E-02			2.95E+00
Primary energy demand (renewable-nonrenewable energy and materials)	MJ	7.99E+03	6.63E+02	1.10E+01	0	0	0	2.05E+01	3.37E+01	7.48E+01			8.79E+03
(ADP) abiotic depletion potential fossil	MJ	4.96E+03	6.30E+02	9.07E+00	0	0	0	1.96E+01	2.84E+01	6.35E+01			5.71E+03

Global warming potential summary

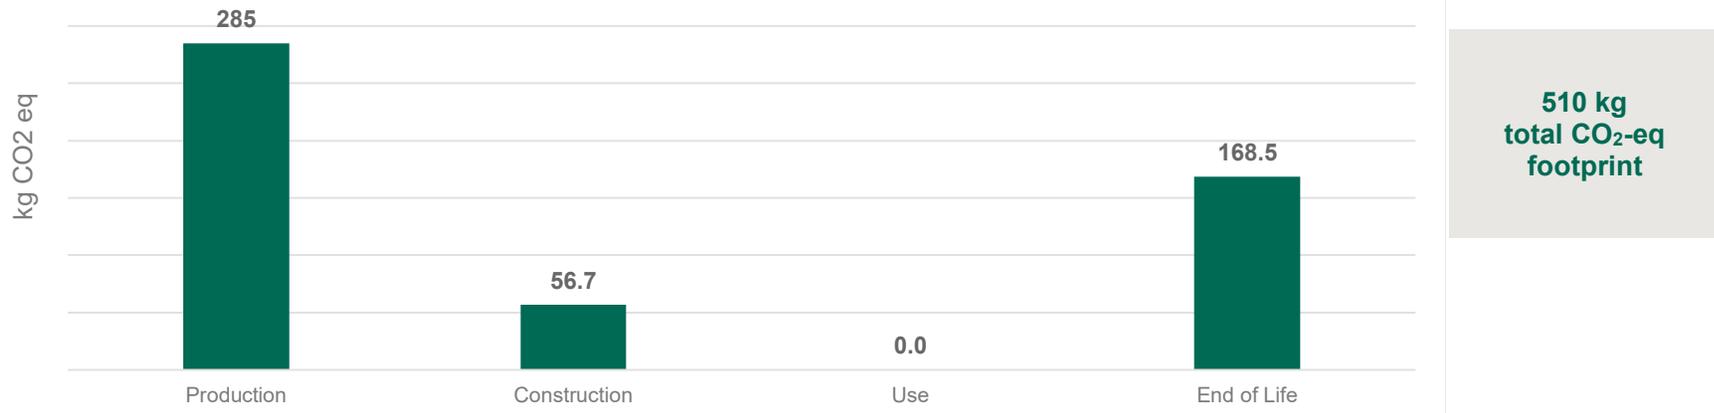

TECHNICAL INFORMATION AND SCENARIOS FOR MODULES BEYOND THE FACTORY GATE

A4: Transport to the installation site

Parameter	Value per product	Value per product
Transportation type	Truck trailer	Ship
Fuel consumption (l/km)	0.42 diesel	130 heavy fuel oil
Distance*	966 km	2.91 km

*Weighted average distance per product market share

A5: Installation in the building

Parameter	Value per functional unit
Installation Assumptions	No product waste Installed with hand tools
Energy use for installation	0 kWh
Transportation type for installation waste	Truck
Fuel consumption (l/km)	0.42 diesel
Distance	32.2 km
Cardboard + paper+wood for recycling	15.614 kg
Plastic for recycling	0.46 kg

B1, B2, B3, B4, B5, B6, B7: Use

There are no emissions, resources used, or transportation related to these modules

C1- C4: End-of-life

Parameter	Value per functional unit
Method of deconstruction	Hand tools
Method of recycling	Mechanical recycling
Method of energy recovery	Incineration
Final disposal of remaining parts	Landfilling
Transportation type	Truck
Fuel consumption (l/km)	0.42 diesel
Distance to waste processing site	32.2 km
Weight to recycling	13.73 kg
Weight to energy recovery	52.41 kg
Weight to landfill	209.65 kg


ADDITIONAL ENVIRONMENTAL INFORMATION

The following product composition, packaging composition, pre- and post-consumer recycled content and the global warming potential results represent the Elective Elements configuration in this study without scaling to the functional unit.

Product composition			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Particle board	570.00	84.53%	0	0	50	285
Steel	39.707	5.89%	24	9.53	22	8.91
Plywood	21.403	3.17%	0	0	0	0
ABS	16.971	2.52%	0	0	0	0
Nylon (PA6 and PA66)	11.938	1.77%	0	0	0	0
MDF	8.498	1.26%	0	0	50	4.25
Other plastics	1.961	0.29%	0	0	0	0
Aluminum	1.676	0.25%	26	0.44	30	0.50
Solid wood	0.813	0.12%	0	0	0	0
Other metals	0.780	0.12%	0	0	0	0
Polyurethane (PU)	0.525	0.08%	0	0	0	0
Polyester fabric	0.048	0.01%	0	0	0	0
Total	674.32	100%	--	9.97	--	298.67

Product packaging			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	36.846	58.19%	40	14.74	0	0
Plastics	25.143	39.71%	0	0	0	0
Solid wood	0.907	1.43%	0	0	0	0
Paper	0.423	0.67%	0	0	0	0
Total	63.319	100%	--	14.74	--	0

IPCC AR6	Unit	Production			Use		End of Life				Totals
		A1-A3	A4	A5	B1	B4	C1	C2	C3	C4	
(GWP) Global warming potential 100 years excludes biogenic carbon	kg CO2eq	6.97E+02	1.22E+02	1.74E+01	0	0	0	3.84E+00	1.59E+01	3.93E+02	1.25E+03

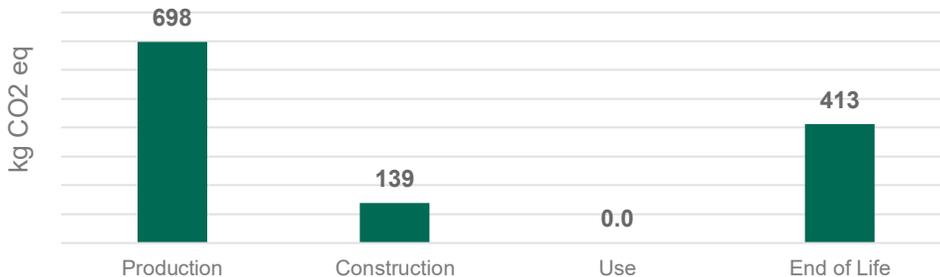

1249 kg total CO₂-eq footprint

Indoor air: Steelcase Systems products are certified with SCS's Indoor Advantage Gold™ program, conforming to the ANSI/BIFMA Furniture Emissions Standard (M7.1/X7.1-2011 R2021) and CDPH/EHLB Standard Method (CA 01350) v1.2-2017. The certification can be found [here](#).

Improper disposal of product: At the end of its useful life, manage Steelcase products correctly in accordance with all applicable regulations for effective end-of-life management, including recycling, disposal, or incineration. Improper management may result in the release of chemicals that may represent a risk to the environment and human health & safety.

REFERENCES

ANSI/BIFMA X5.5-2021, Desk and Table Products.

ANSI/BIFMA X5.6-2016 (R2021), Panel Systems.

ANSI/BIFMA X5.9, Storage Units.

ANSI/BIFMA e3, Furniture Sustainability Standard.

ACLCA Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017. May 2019

BIFMA PCR for Office Furniture Workspace V2 March 2025: UNCPC 3814

ISO 14025:2006 Environmental Labels and Declarations – Type III Environmental Declarations – Principles and Procedures.

ISO 14040:2006 Environmental Management – Life Cycle Assessment – Principles and Framework, Requirements and Guidelines.

ISO 14044:2006 Environmental Management – Life cycle assessment – Requirements and Guidelines.

ISO 14044: 2006/ Amd 1:2017 Environmental Management – Life cycle assessment – Requirements and Guidelines – Amendment 1.

ISO 21930:2017 Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services.

Life Cycle Assessment, LCA Report for Workspace Products by Steelcase. October 2025.

NSF Certification Policies for Environmental Product Declarations (EPD). November 1, 2022.



Visit steelcase.com

 facebook.com/Steelcase

 twitter.com/Steelcase

 youtube.com/SteelcaseTV

Contact
For further questions, please contact:
epd@steelcase.com